
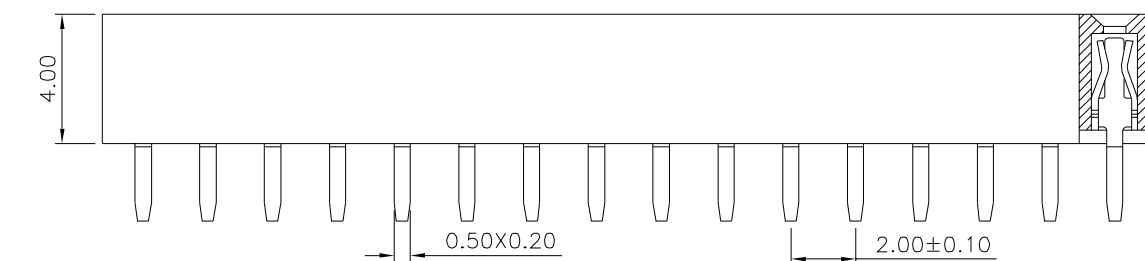



△ SPECIFICATION

Current Rating:1.5 Amp/Contact
 Withstand Voltage:450V AC/Minute
 Contact Resistance:20 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 RoHS Compliant

Recommended P.C.B. Layout

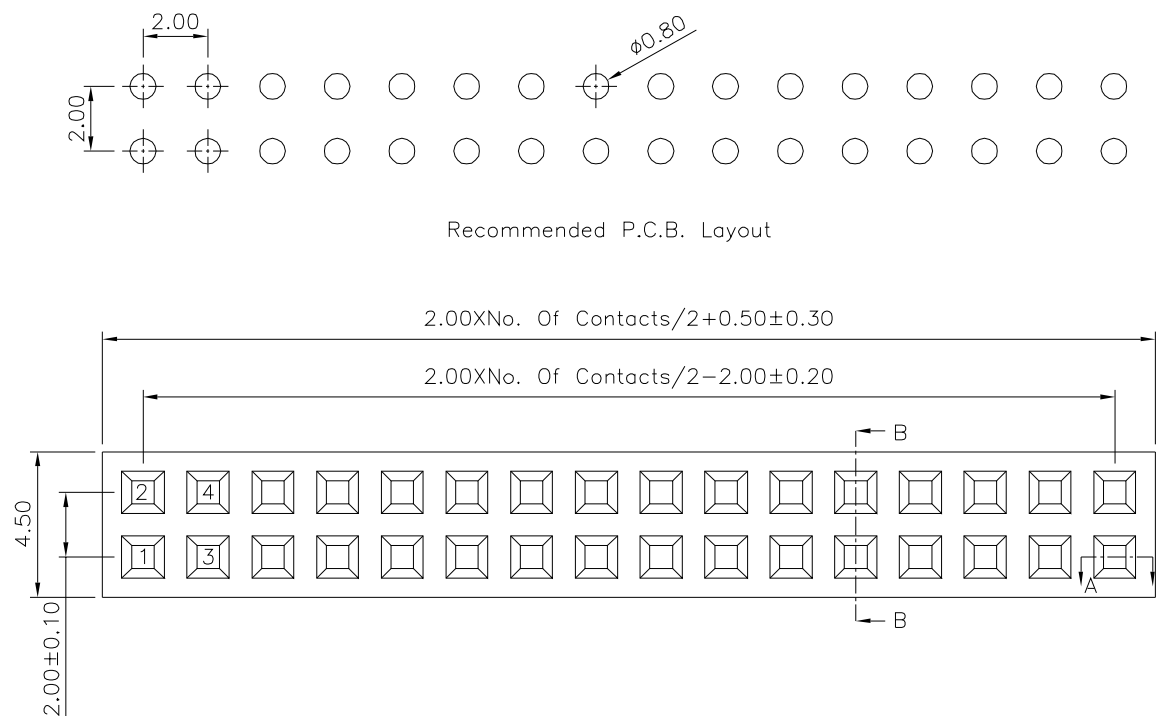

Section A-A



Section B-B

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 17442		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 X ±0.30 .XX ±0.20 .xxx ±0.10 ANG. ±5°						
		MEI								
		CHECKED BY								
		HZF								
DRAWING BY		SONG					A1	Modify Data	HZF	10/16/2013
							A0	NEW RELEASE	HZF	11/30/2011
SCALE	NONE	REV.	A1	UNIT mm		NO.	REV.	REVISIONS	CHK	DATE