
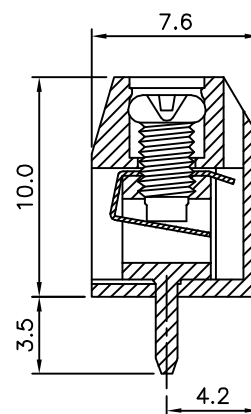
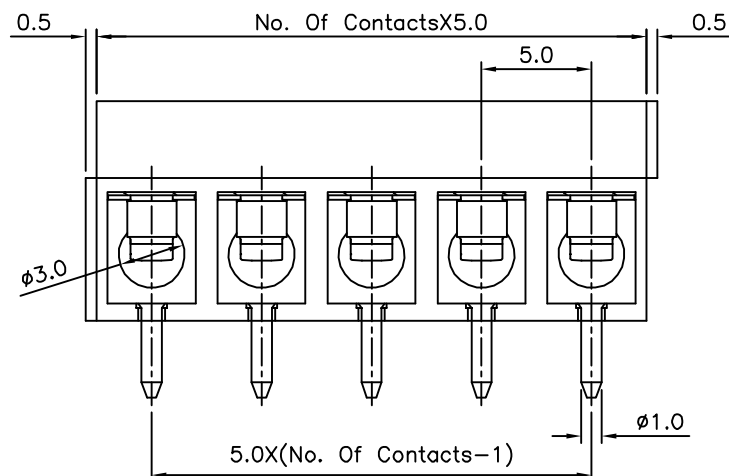


Recommended P.C.B. Layout

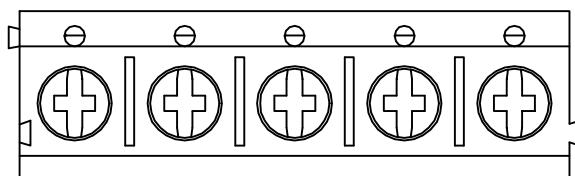

SPECIFICATION

Voltage Rating:250V AC

Current Rating:15 Amps/Way Max.

Contact Resistance:20 Milliohms Max.

Withstanding Voltage:2500V AC(1 Minute),Test Time=60s/1 PCS

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Soldering Reliability: Test Temperature: $250^{\circ}\text{C} \pm 10^{\circ}\text{C}$ 5s Max.

Torque:4.0 Kgf.cm/M2.5

Wire Range:14~24 AWG

Terminal: Copper Alloy, Tin Plated

Screw: Steel, Galvanized With Cr3+ Plated

Wire Guard:Stainless Steel

Insulator Body(Housing):Polyamide(UL94V-0),Blue

RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

17590

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

HAO

REV.	BO
------	----

UNLESS OTHERWISE SPECIFIED	
	TOLERANCES ARE
X.	± 0.50
.X	± 0.30
.XX	± 0.20
ANG.	$\pm 1^\circ$

UNIT	mm
------	----



	B0
NO.	REV.

NEW RELEASE

REVISIONS

HZF

11/05/2015

CHK

DATE _____