

SPECIFICATION






Withstanding Voltage:500V AC One Sec Level
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Total Mating Force:3.5 Kgf Max.
 Total Unmating Force:1.0 Kgf Min.

Contact Finish:

Gold Flash On Contact Area,Tin

Plated On Solder Tails,Over Nickel

RoHS Compliant

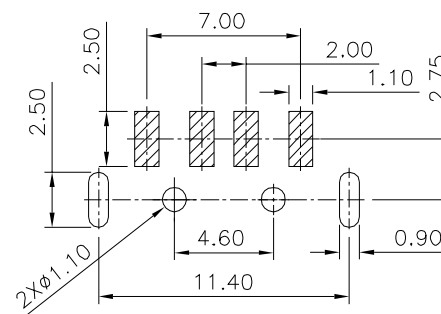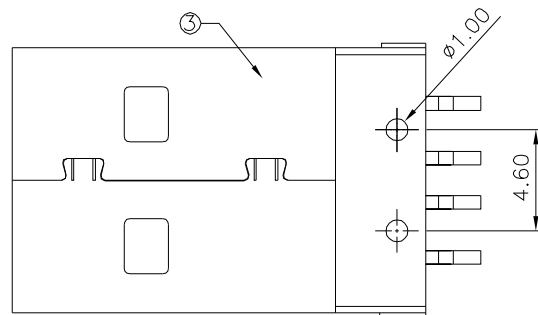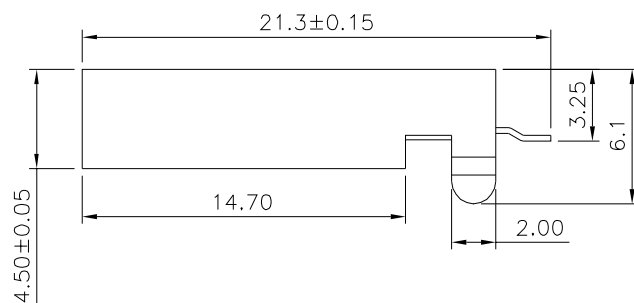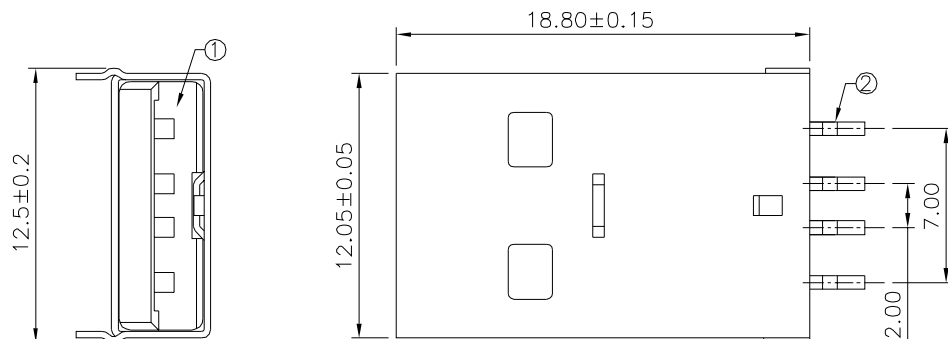

Recommended P.C.B. Layout

③	Shell	SPCC	Nickel Plated	1
②	Terminal	C2680		4
①	Housing	PA6T	Black	1
No.	Description	Material	Remark	Q'ty

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

17625

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


X. ±0.50 X.* ±2.0*

.X ±0.20 .X.* ±1.0*

.XX ±0.10 .XX.* ±0.5*

UNIT

mm



△ A0

NO.REV.

NEW RELEASE

REVISIONS

HZF

CHK

01/29/2016

DATE