
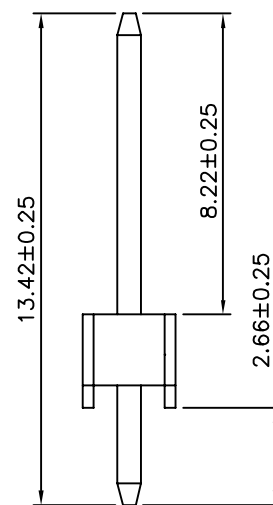
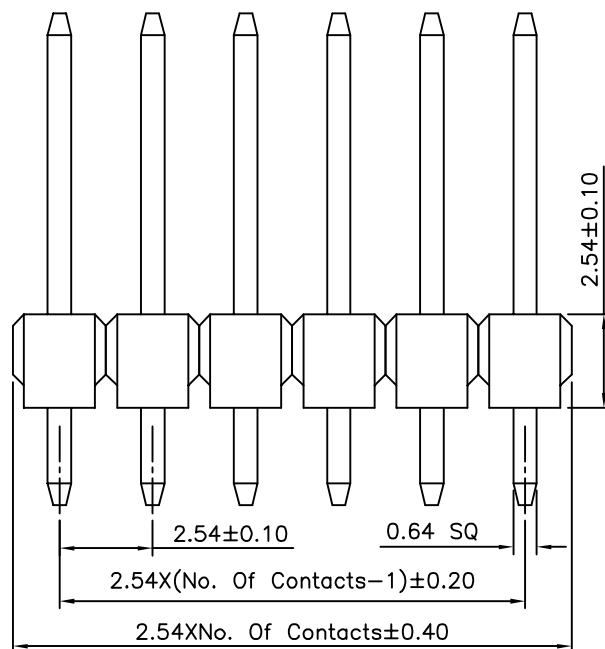


Recommended P.C.B Layout

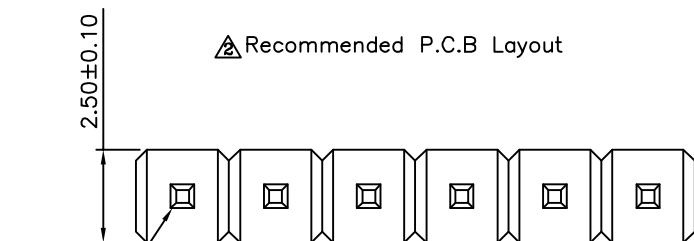

SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:2~40 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

17686

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

ANG. $\pm 5^\circ$

SCALE

NONE

REV.

A3

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
A3		Modify Data	HZF	08/28/2015
A2		Modify Data	HZF	09/07/2012
A1		Modify Data	HZF	11/13/2008
A0		NEW RELEASE	SHIN	03/14/2006