
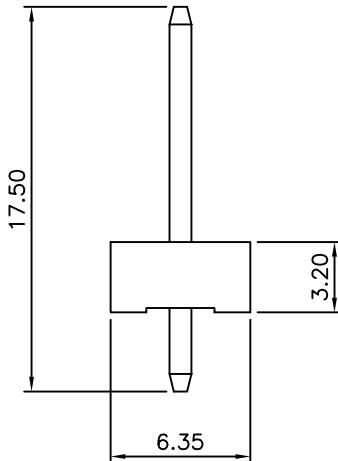
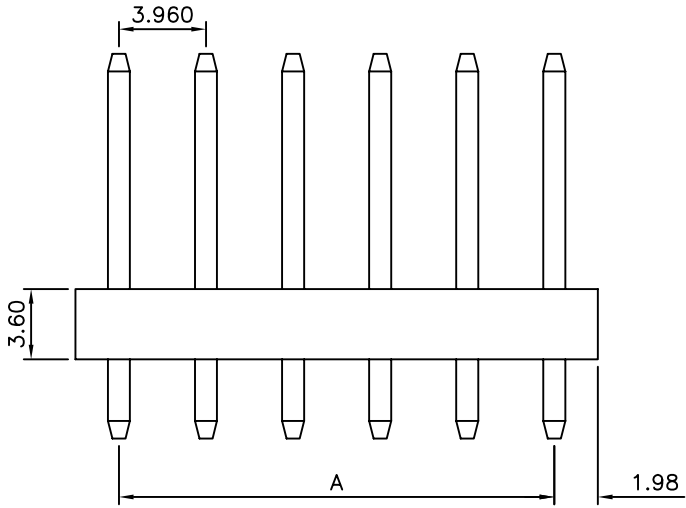
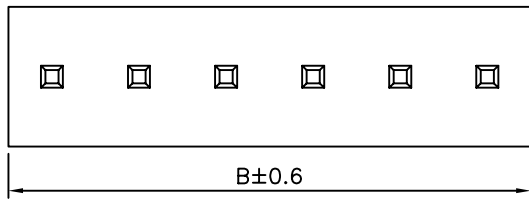


SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Contact Resistance: 10 Milliohms Max.
 After Environmental Testing/20 Milliohms Max.
 Dielectric Withstanding Voltage: 1500V AC/Minute
 Ambient Temperature Range: -40°C~+105°C
 (Including Temperature Rise)
 Base: UL94V-2 Nylon 66
 Post: 1.14mm Square Wire Pins
 Tin-Plated Brass Pin Plating Options Available

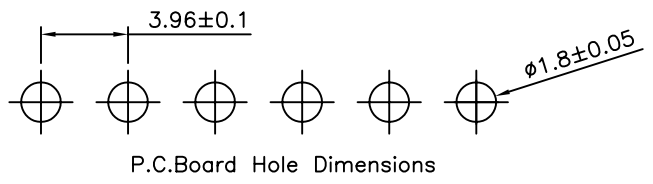

Pin	A	B
2	3.96±0.10	7.92
3	7.92±0.15	11.88
4	11.88±0.15	15.84
5	15.84±0.15	19.80
6	19.80±0.20	23.76
7	23.76±0.20	27.72
8	27.72±0.20	31.68
9	31.68±0.20	35.64
10	35.64±0.25	39.60
11	39.60±0.25	43.56
12	43.56±0.25	47.52
13	47.52±0.30	51.48
14	51.48±0.30	55.44
15	55.44±0.30	59.40
16	59.40±0.30	63.36
17	63.36±0.30	67.32
18	67.32±0.35	71.28
19	71.28±0.35	75.24
20	75.24±0.40	79.20
21	79.20±0.40	83.16
22	83.16±0.40	87.12
23	87.12±0.45	91.08
24	91.08±0.45	95.04

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 17797

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY PEGA

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.10

SCALE NONE REV. AO



UNIT mm
 △ AO NEW RELEASE HZF 04/25/2006
 NO. REV. REVISIONS CHK DATE