

SPECIFICATION

1.Material&Finish

Insulator:LCP+30%G.F.(UL94V-0)

Contact:Brass,Tin Plated Over Nickel

2.Electrical Characteristics

Current Rating:5A

Contact Resistance:10 Milliohms Max.



Insulation Resistance:1000 Megaohms Min.

Withstand Voltage:1000V AC/Minute



3.Environmental Characteristics

Temperature Range:-25°C~+85°C

4.RoHS Compliant

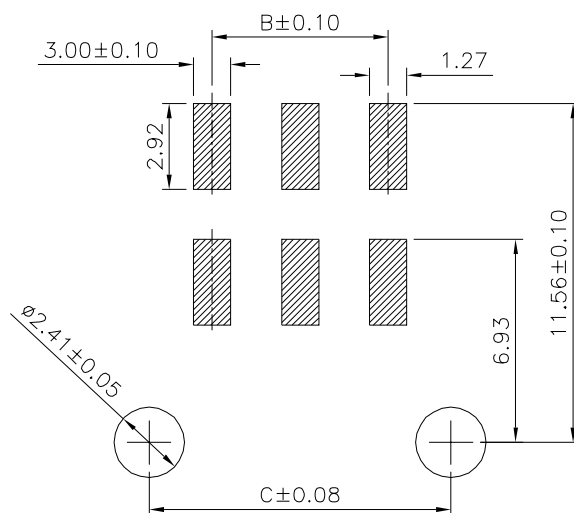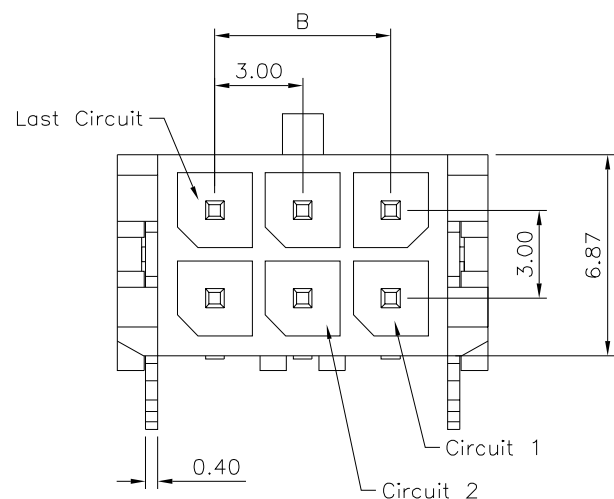

Recommended P.C.B. Layout
(PCB Board Tolerance±0.05)

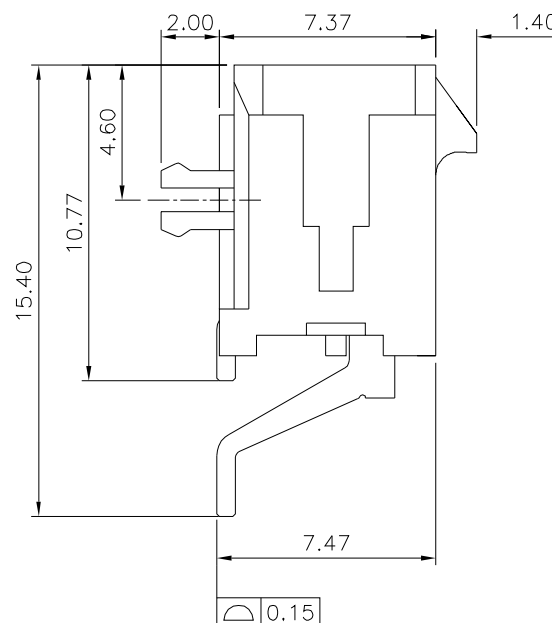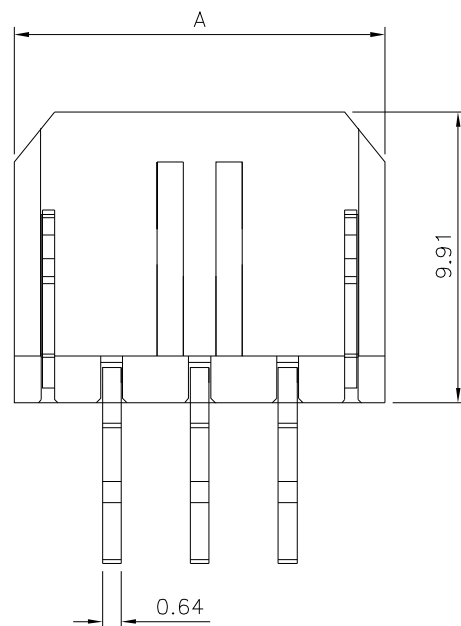

Pin	A	B	C
02	6.65	—	4.30
04	9.65	3.00	7.30
06	12.65	6.00	10.30
08	15.65	9.00	13.30
10	18.65	12.00	16.30
12	21.65	15.00	19.30
14	24.65	18.00	22.30
16	27.65	21.00	25.30
18	30.65	24.00	28.30
20	33.65	27.00	31.30
22	36.65	30.00	34.30
24	39.65	33.00	37.30

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18077

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

07/28/2020

07/28/2020

07/28/2020

07/28/2020

07/28/2020

07/28/2020