


- Specification
- General Information
 - Contact Principle: Friction Technology
 - Mounting Type: SMT
 - Data Contact Material: Copper Alloy
 - Insulator Material: Thermoplastic UL94V-0
 - Data Contacts Plating: Gold Flash Over Nickel
 - Electrical Specification
 - Contact Resistance: 50m ohms Max
 - Insulator Resistance: 1000M ohms Min
 - Dielectrical Withstanding Voltage: 500V AC
 - Voltage Rating: 30V AC R.M.S. 1 Min (Sea Level)
 - Current Rating: 1A Max, 10uA Min
 - Mechanical Specification
 - Contact Force: 0.2N~0.6N
 - Durability: 100,000 Cycles Min
 - Environmental Specification
 - Operating Temperature: -20°C~+70°C
 - Operating Humidity: 20%~95% RH
 - Solderability: 1) Vapor Phase : 215°C, 30 Sec Max.
2) IR Re-Flow : 260°C, 15 Sec Max.
3) Manual Soldering : 360°C, 3 Sec Max.
- .RoHS compliant

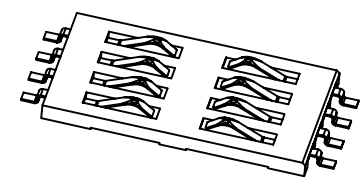

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
18108		MEI		
1308X93022		LHC		
SCALE		REV.		UNIT
NONE		A1		mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	2.10mm---1.70mm	XSH	03/14-2007
△	A0	NEW RELEASE	XSH	1/05-2006