

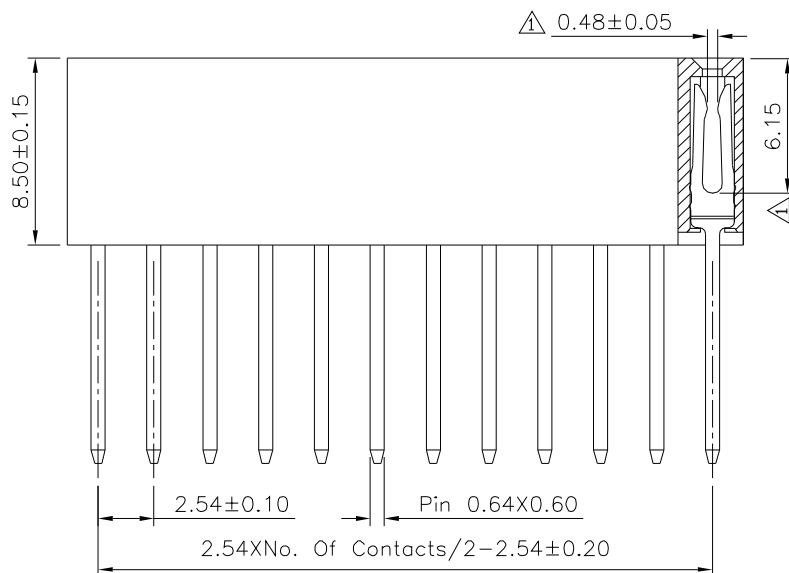


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

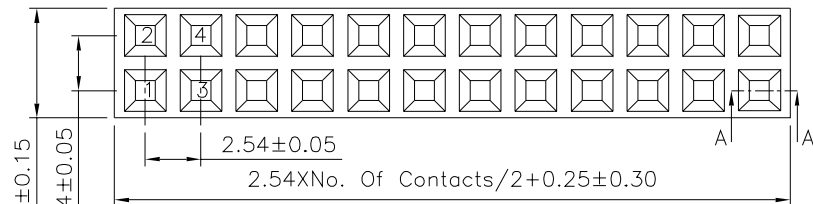

Section A-A

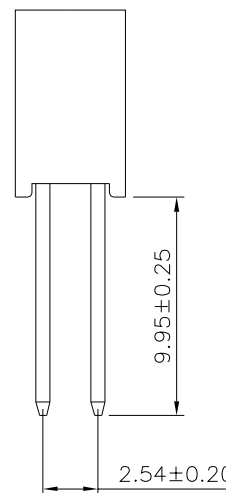

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature: $-40^{\circ}\text{C}\sim +105^{\circ}\text{C}$
⚠ Contact:Brass,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18161

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^{\circ}$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
⚠ A1	Modify Data	HZF	03/10/2020	
⚠ A0	NEW RELEASE	HZF	11/06/2012	