

SPECIFICATION

Current Rating:1 Amp

Dielectric Withstanding Voltage:AC 1000V For 1 Minute

Insulation Resistance:1000 Megaohms Min. At DC 500V

Contact Resistance:30 Milliohms Max. At DC 100mA

⚠ Operation Temperature:-55°C~+125°C






Housing:LCP(UL94V-0)

Contact:Brass

Gold Plated 10u" On Contact Area

Tin Plated On Solder Tails,Over Nickel

RoHS Compliant

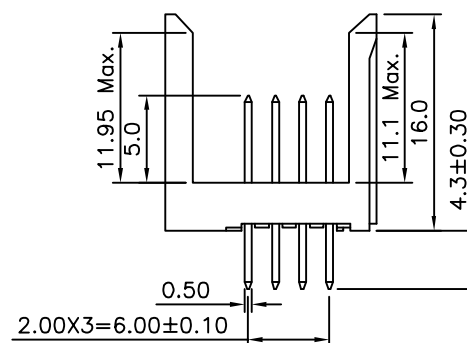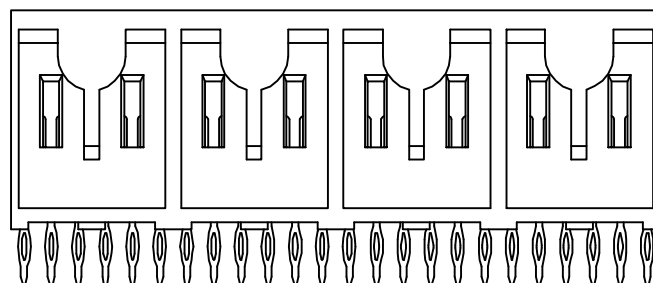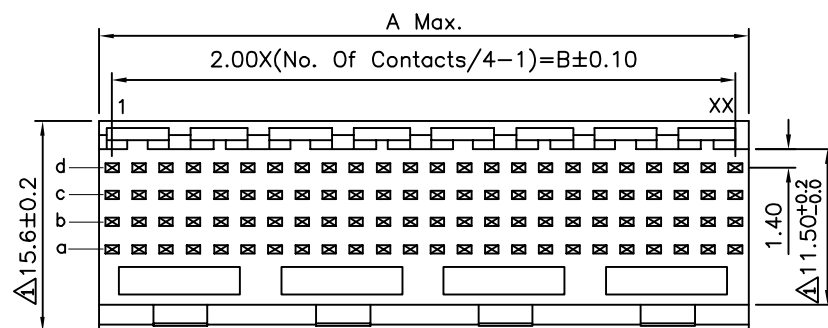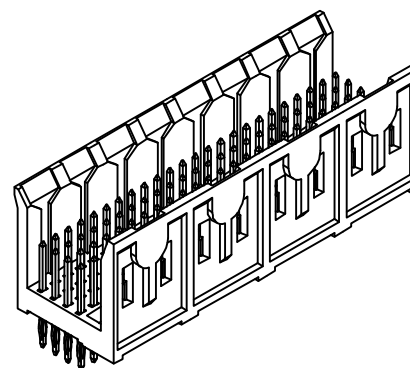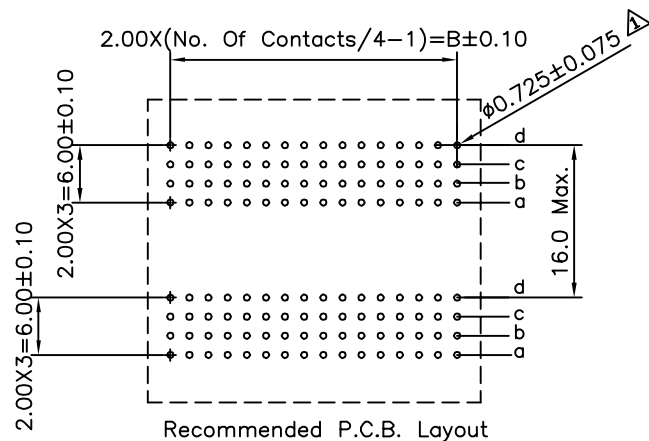

Pin	A	B
24	11.95	10
48	23.95	22
72	35.95	34
96	47.95	46
120	59.95	58
144	71.95	70
168	83.95	82
192	95.95	94

DRAWING No.

18202

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.


A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.5
.X ±0.25
.XX ±0.15

UNIT

mm



A1

Modify Data



A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.