


SPECIFICATION

⚠Current:2.1A Max.
 Voltage:30V Max.
 Withstanding Voltage:500V AC For One Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-55°C~+85°C
 Mating Force:35N Max.
 Withdrawal Force:10N Min.
 Durability:1500 Cycles Min.
 Contact:Brass
 Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Insulator:LCP+30%G.F.(UL94V-0)
 Shell:Brass,Nickel Plated Over All
 RoHS Compliant

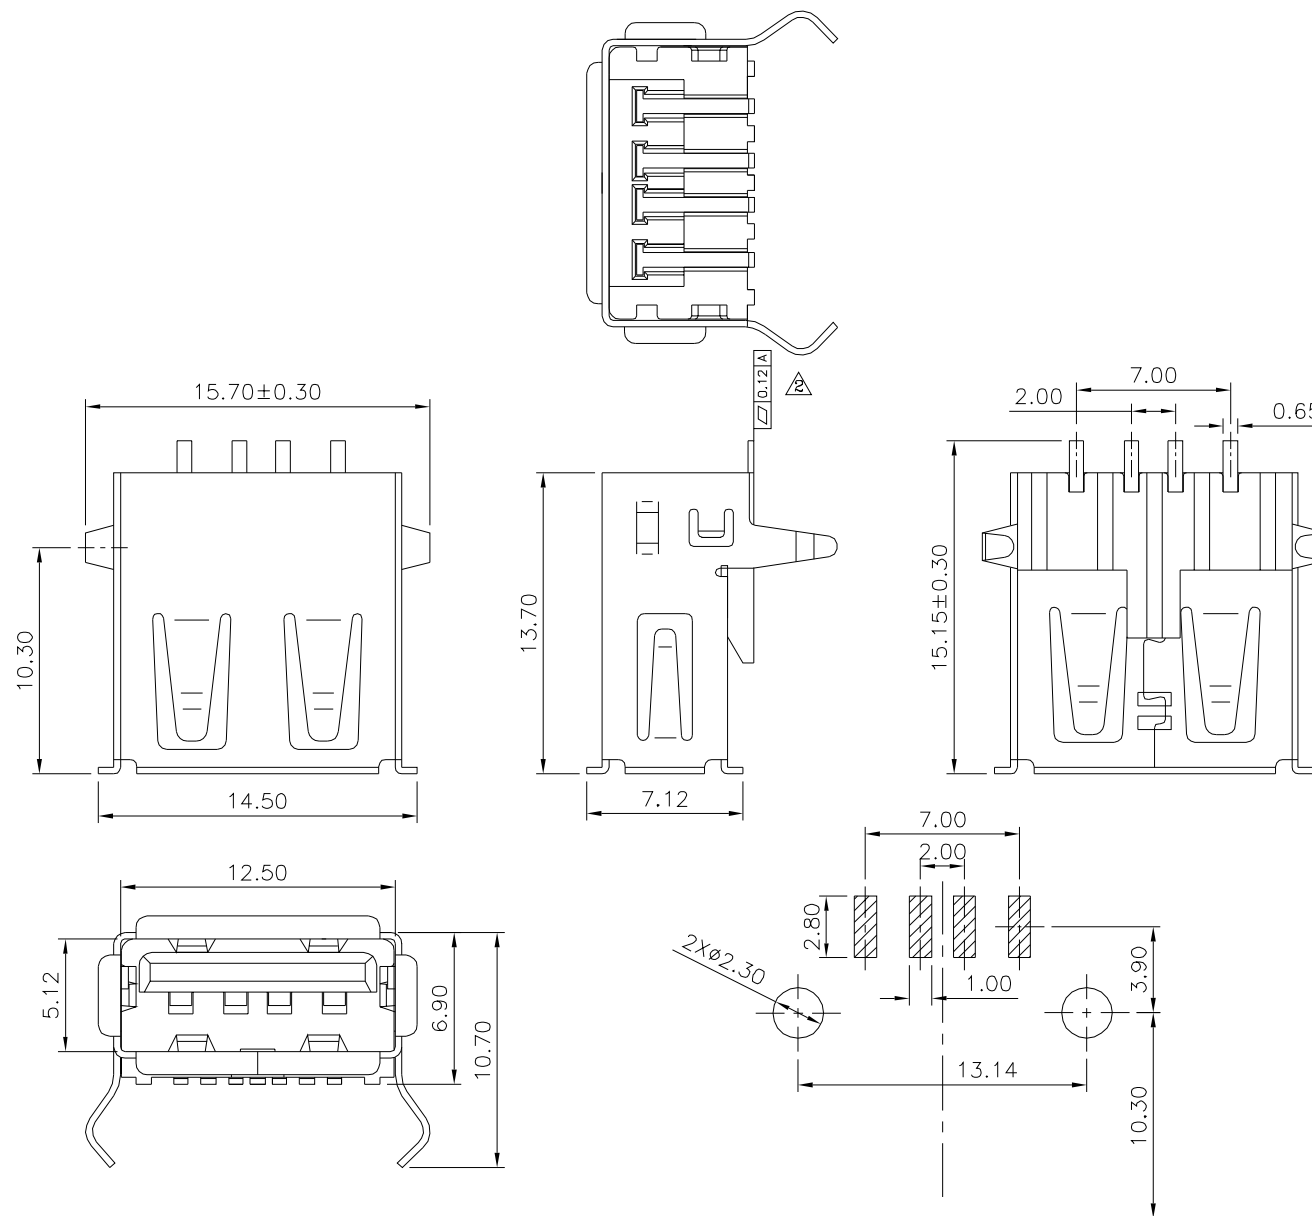

⚠ Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

18666

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

SCALE

NONE

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38 X.* ±3*

.XX ±0.25 .X.* ±2*

.XXX ±0.13 .XX.* ±1* ⚠

UNIT mm



	A2	Modify Data	HZF	08/19/2021
	A1	Modify Data	HZF	07/30/2015
	A0	NEW RELEASE	HZF	10/25/2012
NO. REV.	REVISIONS		CHK	DATE