


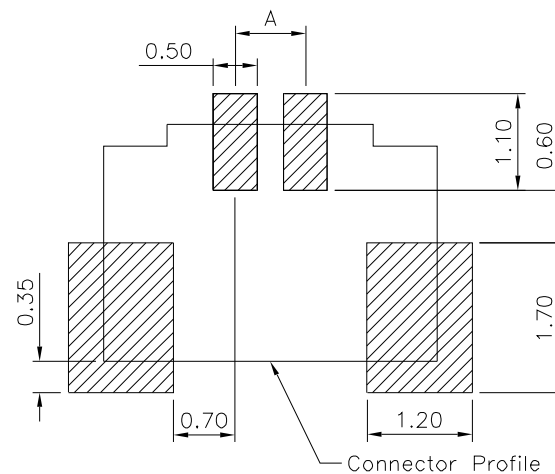


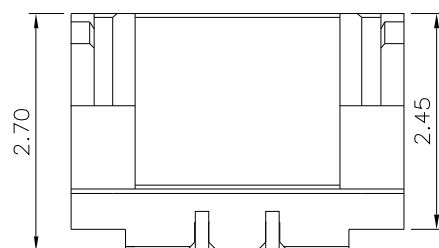


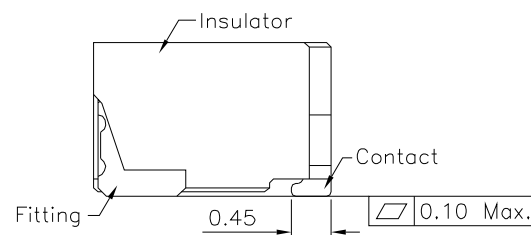

Recommended P.C.B. Layout
(PCB Board Tolerance ± 0.05)

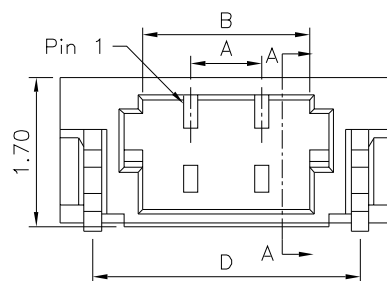

Section A-A

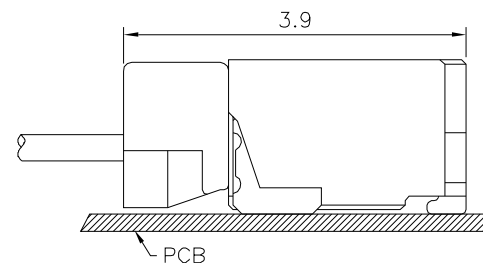

Mated Condition

△ SPECIFICATION

Current Rating: 0.5A AC, DC
Voltage Rating: 30V AC, DC
Withstand Voltage: 200V AC/Minute
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 100 Megaohms Min.
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact: Phosphor Bronze, Gold Flash Over All, Over Nickel
Insulator: LCP (UL94V-0), Nature
Fitting Nail: Brass, Gold Flash Over All, Over Nickel
RoHS Compliant

Pin	A	B	C	D
2	0.80	1.90	3.78	3.04
3	1.60	2.70	4.58	3.84
4	2.40	3.50	5.38	4.64
5	3.20	4.30	6.18	5.44
6	4.00	5.10	6.98	6.24
7	4.80	5.90	7.78	7.04
8	5.60	6.70	8.58	7.84
9	6.40	7.50	9.38	8.64
10	7.20	8.30	10.18	9.44
11	8.00	9.10	10.98	10.24
12	8.80	9.90	11.78	11.04
13	9.60	10.70	12.58	11.84
14	10.40	11.50	13.38	12.64
15	11.20	12.30	14.18	13.44
16	12.00	13.10	14.98	14.24
17	12.80	13.90	15.78	15.04
18	13.60	14.70	16.58	15.84
19	14.40	15.50	17.38	16.64
20	15.20	16.30	18.18	17.44

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

18712

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10 △
ANG. $\pm 2^{\circ}$

UNIT
mm



△

△

NO.

REV.

REVISIONS

CHK

DATE

DATE