
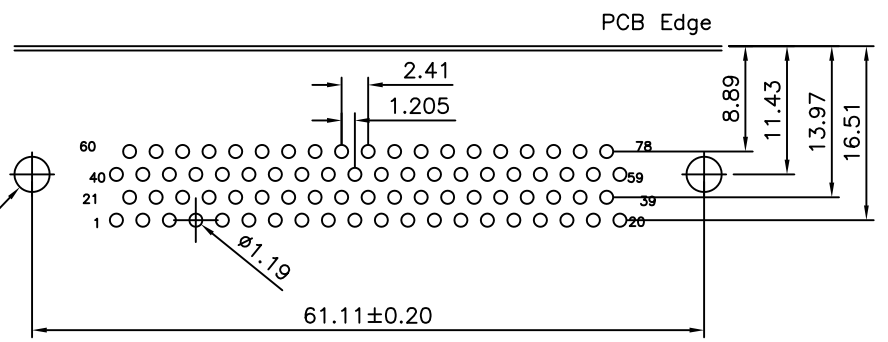
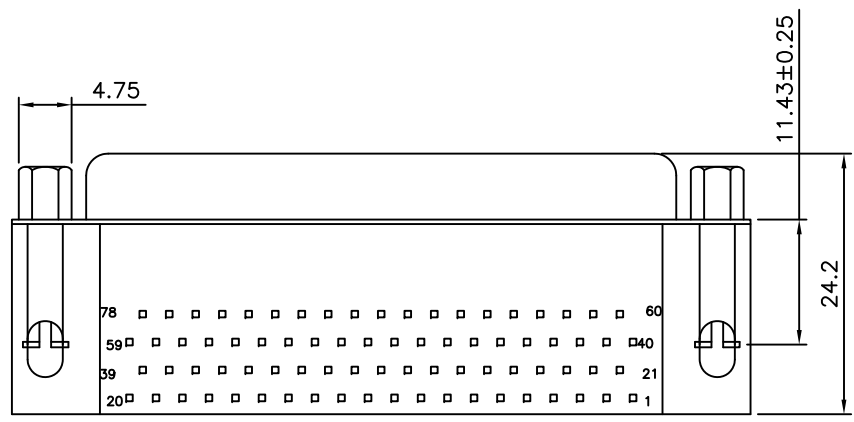
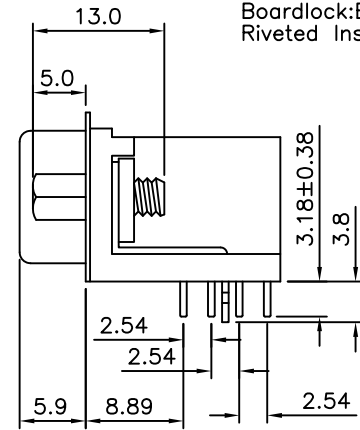


SPECIFICATION

Current Rating:2Amp
 Dielectric Withstanding Voltage:1000V AC For 1Minute
 Insulation Resistance:1000Megohms Min At 500V DC
 Contact Resistance:15Milliohms Max
 Operating Temperature:-55°C~+105°C
 Insulator:PBT,UL 94V-0
 Contact:Copper Alloy
 Contact Finish:Gold On Mating End Tin On Termination End
 With Entire Contact Nickel Underplated
 Shell:Steel
 Boardlock:Brass Tin Plated
 Riveted Insert:Brass Nickel Plated

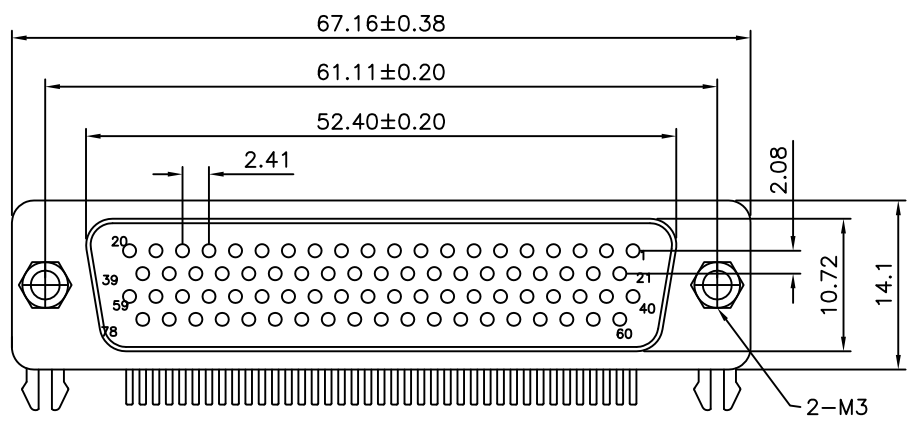

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANG: ±1°
18748		MEI		
		CHECKED BY	HZF	
		DRAWING BY	JLT	
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	04/30/2007