

File No.	439KI20801	SHEET	1/1	1


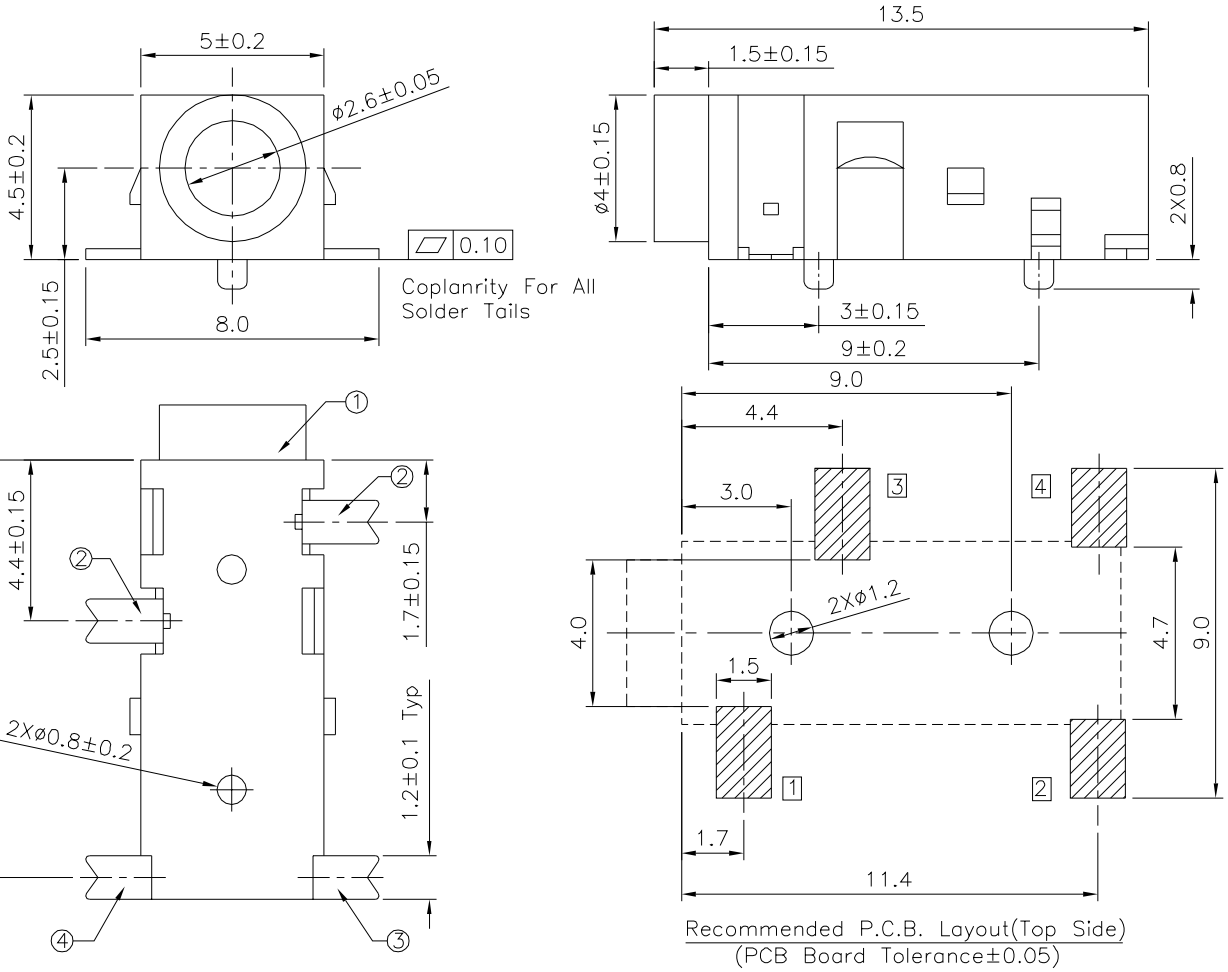


SPECIFICATION

Rating:DC 30V,0.5A
Withstand Voltage:500V AC
Contact Resistance:30 Milliohms Max.
After Test:50 Milliohms Max.
Insulation Resistance:100 Megaohms Min. (500V DC)
After Test:50 Megaohms Min.
Insertion And Extraction Force:3N~30N
Life Test:5000 Cycles Min.
Operation Temperature Range:−20°C~+70°C
Storage Temperature Range:−40°C~+85°C
RoHS Compliant

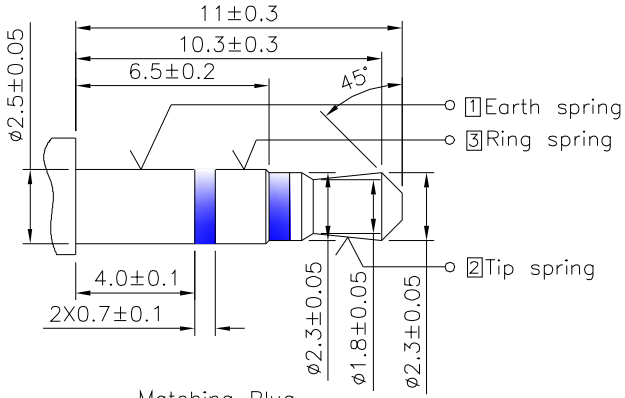

Matching Plug

Item No.	18901	18900
Schematic		

NO.	Description	Q'ty	Material	Remark
④	Shunt Terminal 4	1	Brass	Silver Plated
③	Tip Spring 2	1	Phosphor Bronze	Silver Plated
②	Ring Spring 1 3	2	Phosphor Bronze	Silver Plated
①	Housing	1	PA9T	Black

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	18900
APPROVED BY	EMILY
CHECKED BY	HZF
DRAWING BY	GAO
SCALE	NONE
REV.	B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.3
X. ±0.3
ANG. ±2°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	B1	Del Packing	HZF	09/20/2013
0	B0	NEW RELEASE	HZF	01/15/2013