File No.	432	SHEET	1/1

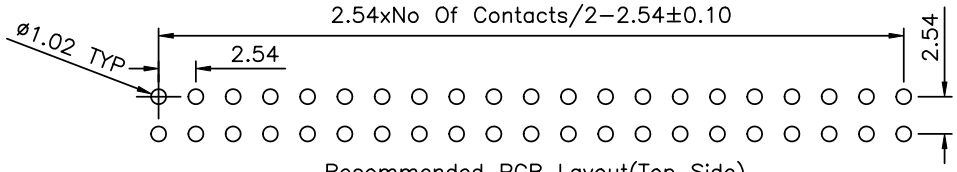

Recommended PCB Layout(Top Side)

PCB Tolerance±0.05

SPECIFICATION

Current Rating:3.0Amp
Voltage Rating:350V
Contact Resistance:20Milliohms Max
Insulation Resistance:1000Megohm Min
Withstad Voltage:1000V AC/Minute
Operation Temperature:−40°C~+105°C
Contact Material:Brass
Contact Plating:Au Over Ni
Latch Material:Zinc Alloy
Latch Plating:Ni
Insulator Material:Polyester(UL94V−0)
Standard:PBT+30%GF
Above 26 Poles With "E" Profile

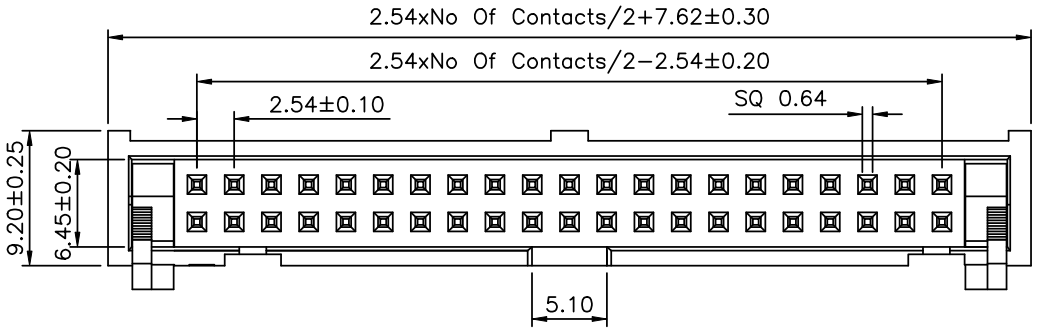

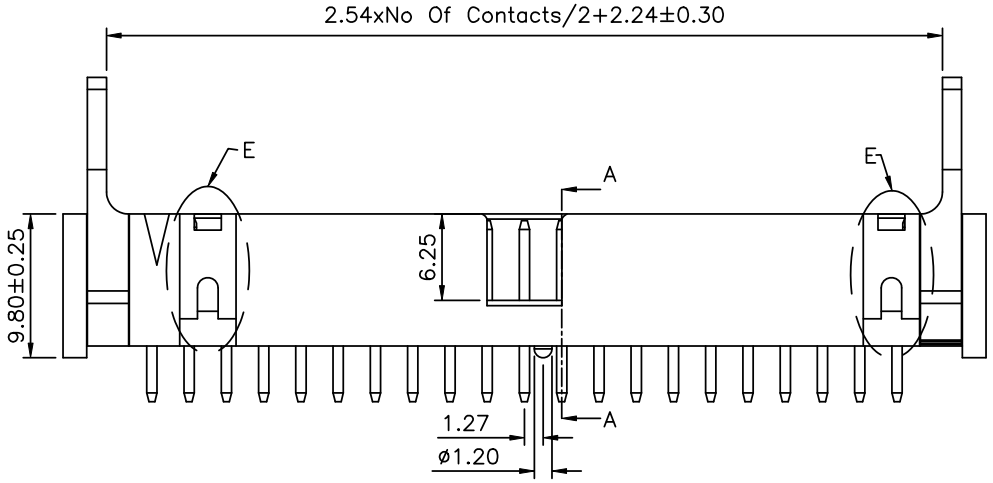

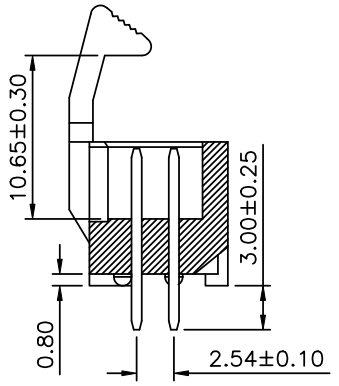

Section A−A

DRAWING No. 19047		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG: ±3°					
		CHECKED BY HZF							
		DRAWING BY JLT							
SCALE	NONE	REV.	A0	UNIT mm					
						0	A0	NEW RELEASE	HZF	11/06/2007
						NO.	REV.	REVISIONS	CHK	DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.