File No.	432	SHEET	1/1

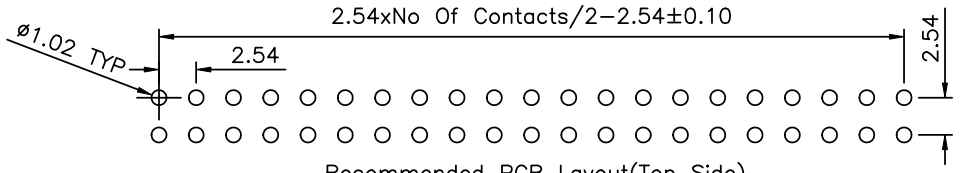

Recommended PCB Layout(Top Side)

PCB Tolerance±0.05

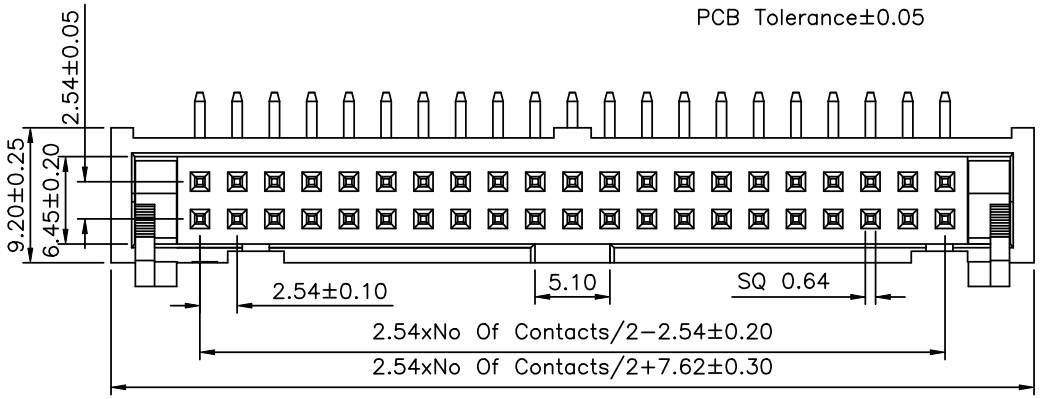

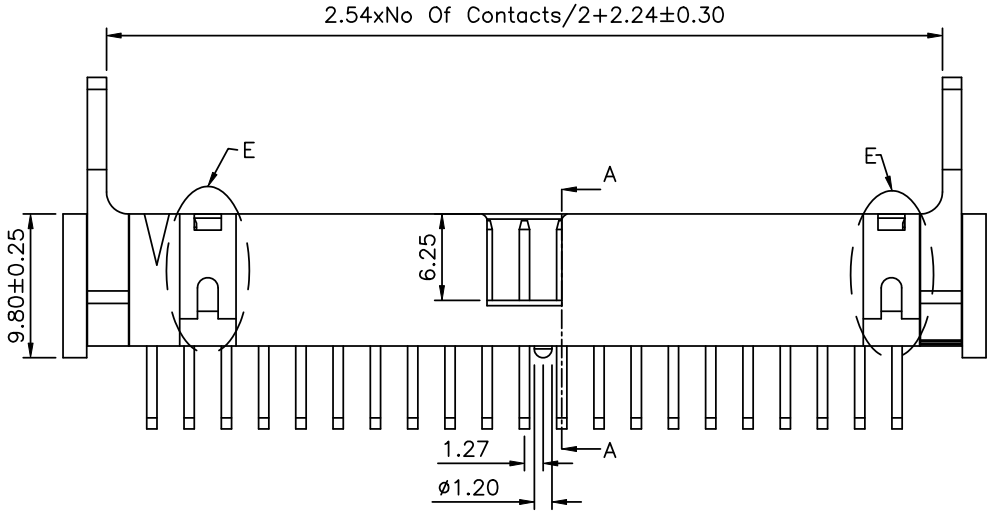

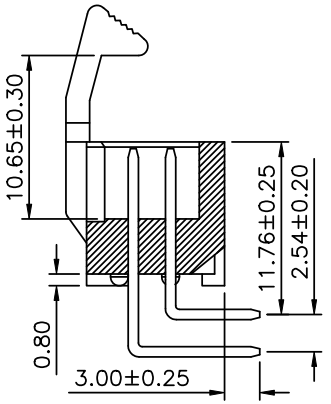

Section A−A

SPECIFICATION

Current Rating:3.0Amp
Voltage Rating:350V
Contact Resistance:20Milliohms Max
Insulation Resistance:1000Megohm Min
Withstad Voltage:1000V AC/Minute
Operation Temperature:−40°C~+105°C
Contact Material:Brass
Contact Plating:Au Over Ni
Latch Material:Zinc Alloy
Latch Plating:Ni
Insulator Material:Polyester(UL94V−0)
Standard:PBT+30%GF
Above 26 Poles With "E" Profile

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG: ±3°
19073	MEI	
	CHECKED BY HZF	
	DRAWING BY JLT	
SCALE NONE	REV. A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	11/06/2007