
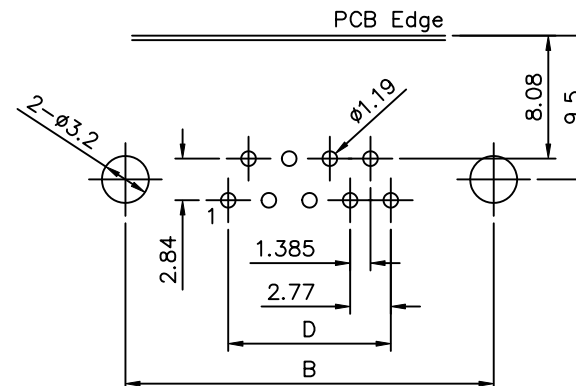
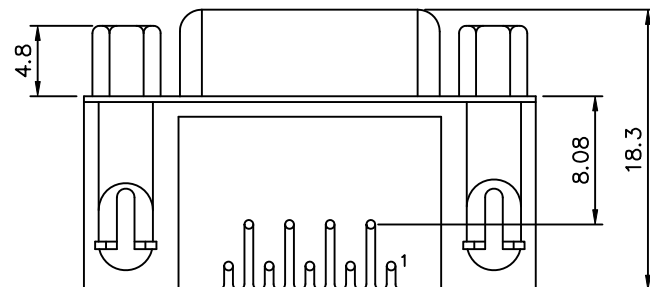
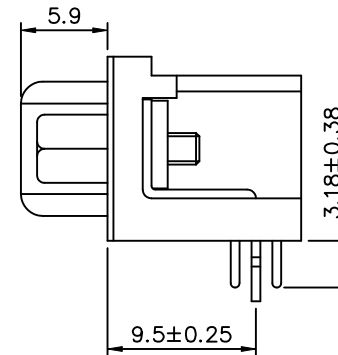


SPECIFICATIONS

Current Rating: 5 Amp
 Dielectric Withstanding Voltage: 1000V AC For 1 Minute
 Insulation Resistance: 1000 Megohms Min. At 500V DC
 Contact Resistance: 15 Milliohms Max.
 Operation Temperature: -55°C~+105°C
 Insulator: PBT+30% Glass Fiber(UL 94V-0)
 Contact: Copper Alloy
 Contact Finish: Gold Over Nickel
 Shell: Steel, Nickel Plated
 Boardlock: Brass, Tin Plated
 Riveted Insert: Brass, Nickel Plated

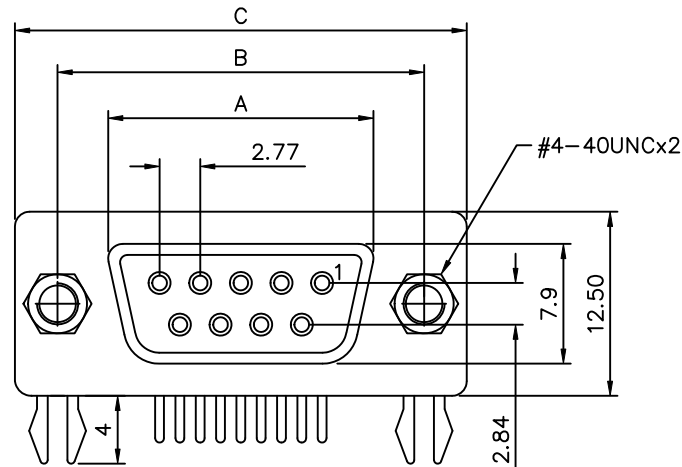

Pos.	A±0.20	B±0.20	C±0.38	D
09	16.30	25.00	30.80	11.08
15	24.60	33.30	39.20	19.39
25	38.35	47.05	53.05	33.24
37	54.80	63.50	69.40	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19109

APPROVED BY

MEI

CHECKED BY

SHIN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 .XXX ±0.05
 ANG ±1°

SCALE

NONE

REV.

A0

UNIT

mm



△ A0

NEW RELEASE

SHIN

01/20/2006

NO. REV.

REVISIONS

CHK

DATE