

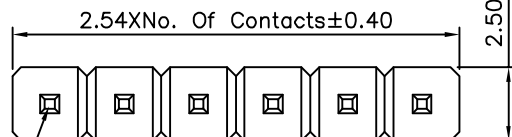


Recommended P.C.B. Layout

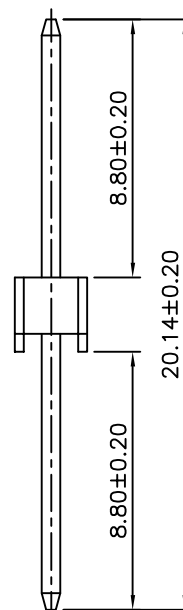

Pin 1

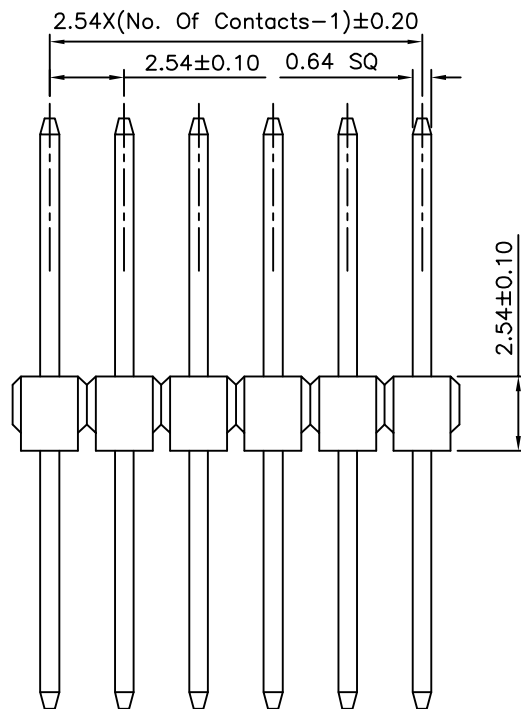

△ SPECIFICATION

Current: 3A
Withstanding Voltage: 1000V AC RMS
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Operation Temperature: -55°C~+105°C
Housing: PBT(UL94V-0),Black
Contact: Copper Alloys,Gold Plated
No. Of Contacts: 2~40 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19122

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1	Modify Data	HZF	08/08/2011	
△ A0	NEW RELEASE	HZF	02/05/2008	