
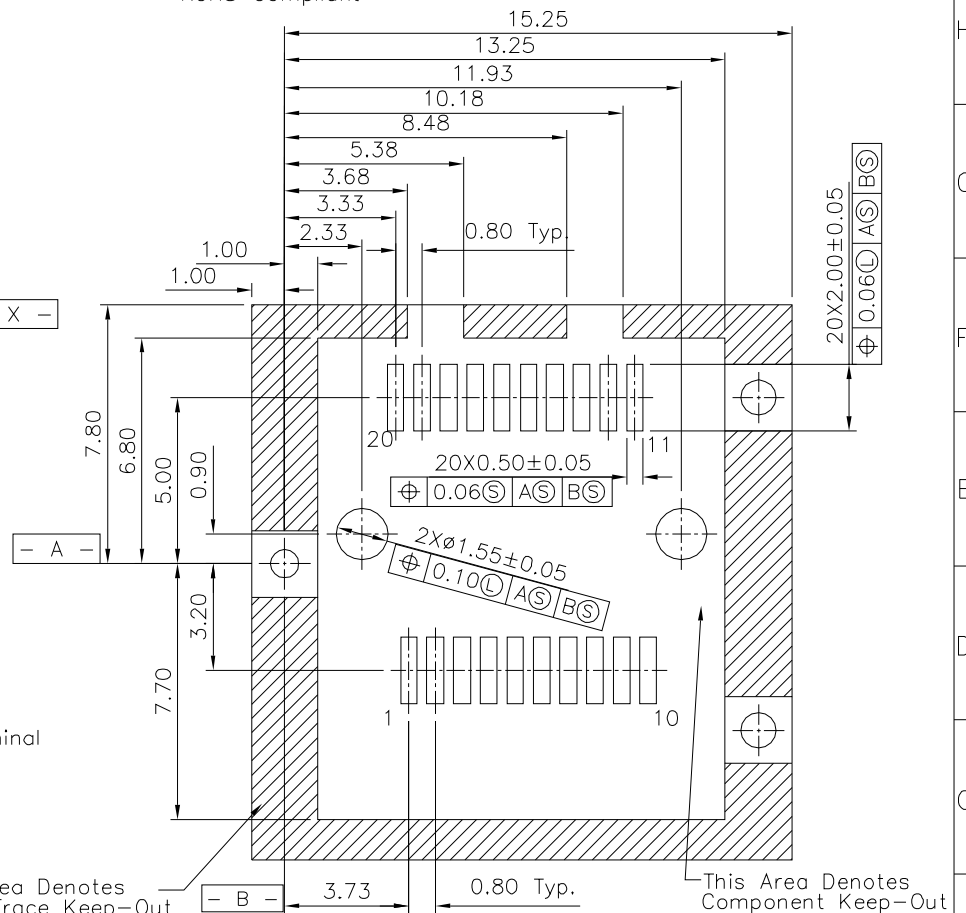
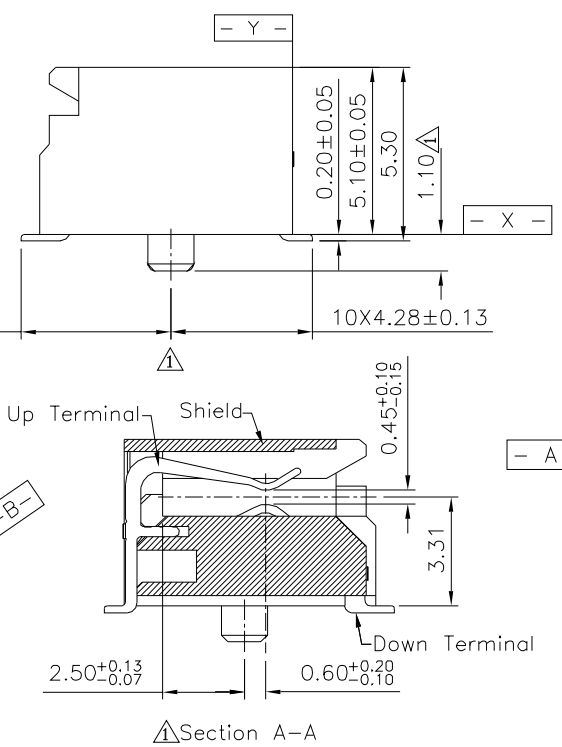


SPECIFICATION

▲ Voltage Rating: 120V AC
 ▲ Current Rating: 0.5 A
 Withstanding Voltage: 300V AC/Minute
 Contact Resistance: 30 Milliohms Max. Initial
 Operation Temperature: -40°C~+85°C
 Durability: 100 Cycles Min.
 Insfrtion And Extraction Forcfc: 40N Max. & 12.5N Max.
 Terminal: Phosphor Bronze
 Gold Plated 30U" On Contact Area, Tin
 Plated On Solder Tails, Over Nickel
 Housing: LCP(UL94V-0), Black
 RoHS Compliant

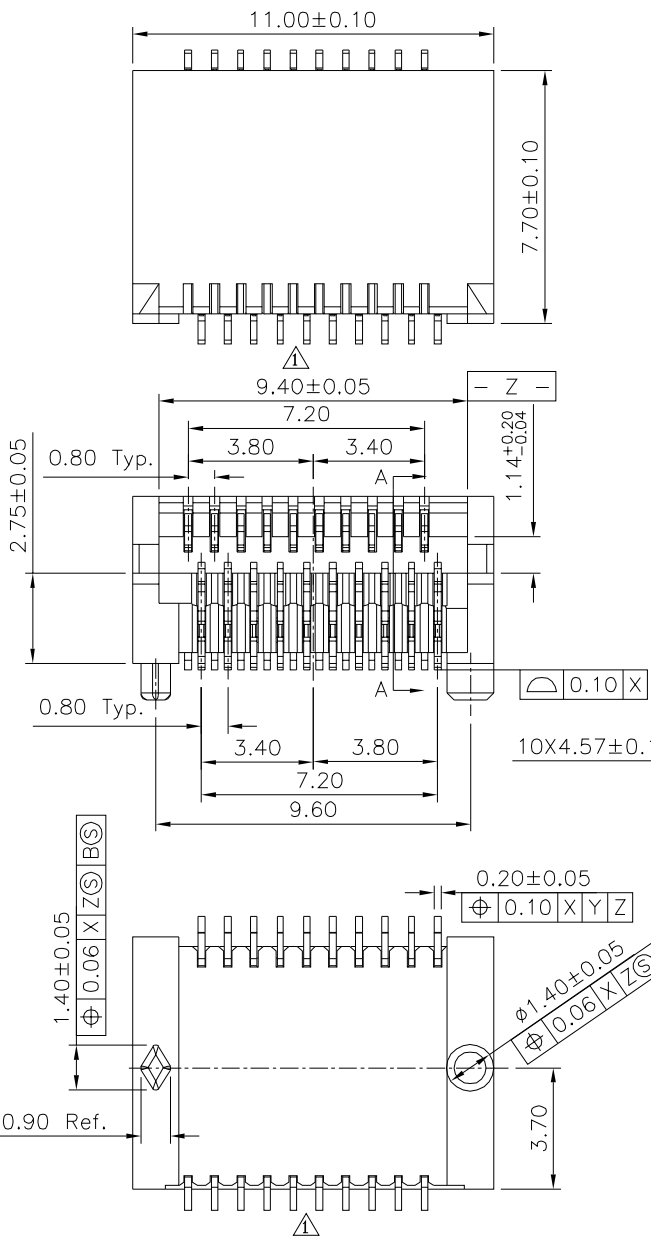

Cross Hatched Area Denotes Component And Trace Keep-Out (Except Chasis Ground)
 ▲ Recommended P.C.B. Layout
 This Area Denotes Component Keep-Out (Traces Allowed)

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. ▲		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X* ±2.00° .X ±0.20 .X* ±1.00° .XX ±0.10 .XX* ±0.50° .XXX ±0.05 .XXX* ±0.10°
19128		MEI		
		CHECKED BY HZF		
		DRAWING BY CYP		UNIT mm
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
▲ A2		Modify Data	HZF	03/06/2020
▲ A1		Modify Data	HZF	11/16/2019
▲ A0		NEW RELEASE	HZF	12/13/2016