



SPECIFICATION
 Rating:DC 50V 1.0A
 Withstand Voltage:500V AC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:100 Megaohms Min. (DC 250V)
 Insertion And Extraction Force:5~35N
 Life Test:1000 Cycles
 RoHS Compliant

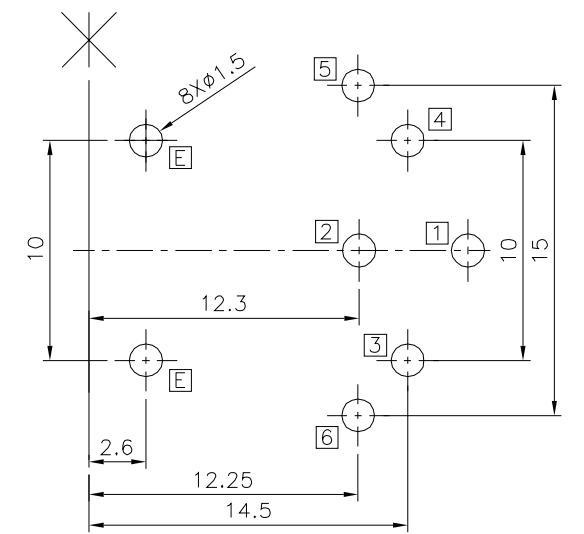

Recommended P.C.B. Layout(Copper-Side View)

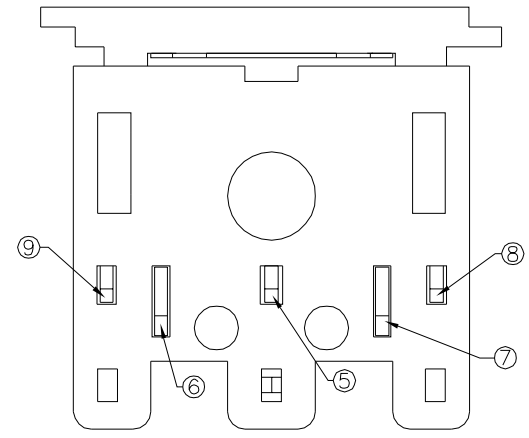

⑨	Contactor Terminal	6	1	Brass	Silver Plated
⑧	Contactor Terminal	5	1	Brass	Silver Plated
⑦	Contactor Terminal	4	1	Brass	Silver Plated
⑥	Contactor Terminal	3	1	Brass	Silver Plated
⑤	Contactor Terminal	2	1	Brass	Silver Plated
④	Contactor Terminal	1	1	Brass	Silver Plated
③	Earth Spring	E	1	Phosphor Bronze	Silver Plated
②	Cover		1	PBT	Black
①	Housing		1	PBT	Black
No.	Description	Q'ty	Material	Remark	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 19143

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY SONG
 REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.3
 .X ±0.3
 .XX ±0.3
 ANG. ±2°
 UNIT mm

	A1	Modify Data	HZF	04/07/2012
	A0	NEW RELEASE	HZF	05/22/2011
NO.	REV.	REVISIONS	CHK	DATE