


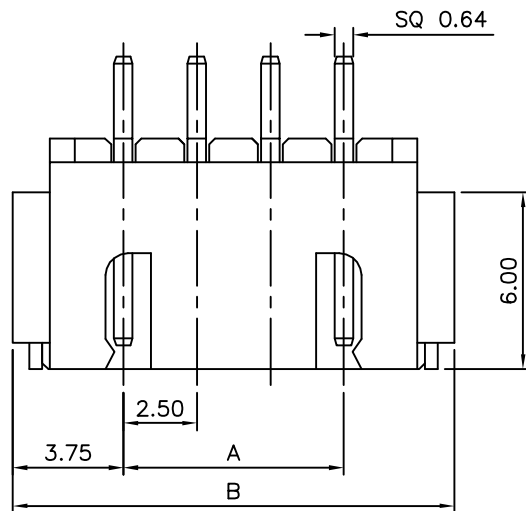





3P~16P

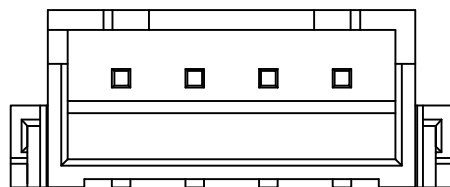

2P

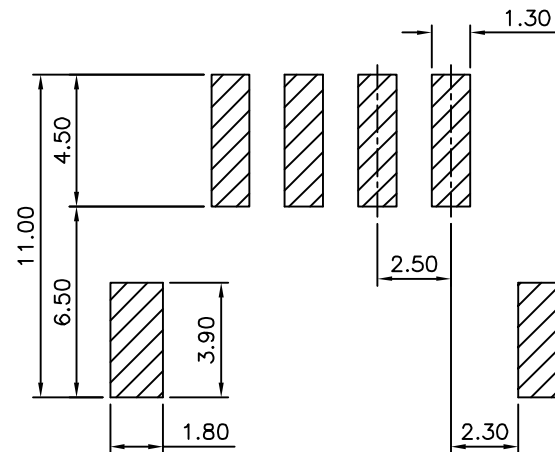

Recommended P.C.B. Layout

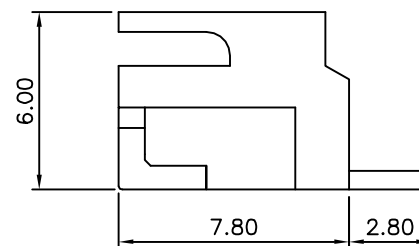

SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC Max.
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megohms Min.
Withstanding Voltage:1000V AC/Minute
Operation Temperature:-25°C~+85°C
⚠ Pin:Brass,Gold Flash Over Nickel
Insulator:PA6T,UL94V-0
Solder Tab:Brass,Tin Plated
RoHS Compliant

⚠	Pin	A	B
*	2	2.5	10.0
*	3	5.0	12.5
*	4	7.5	15.0
*	5	10.0	17.5
*	6	12.5	20.0
*	7	15.0	22.5
*	8	17.5	25.0
*	9	20.0	27.5
*	10	22.5	30.0
*	11	25.0	32.5
	12	27.5	35.0
	13	30.0	37.5
	14	32.5	40.0
	15	35.0	42.5
	16	37.5	45.0

The Mark Of "*" Are Toolled Already

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19273

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.35

.XX ±0.25

ANG.

UNIT

mm



⚠ A1

Modify Data

HZF

02/18/2013

⚠ A0

NEW RELEASE

HZF

10/11/2010




NO. REV.

REVISIONS

CHK

DATE

SPECIFICATION
Q'ty:500 PCS/Reel
RoHS Compliant

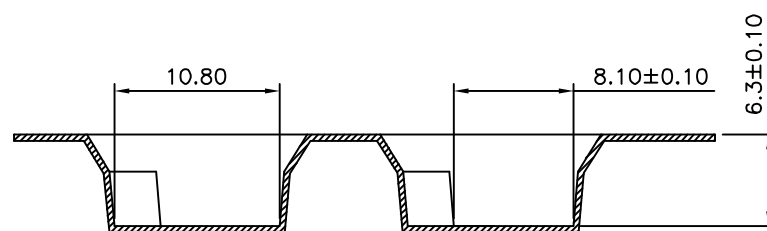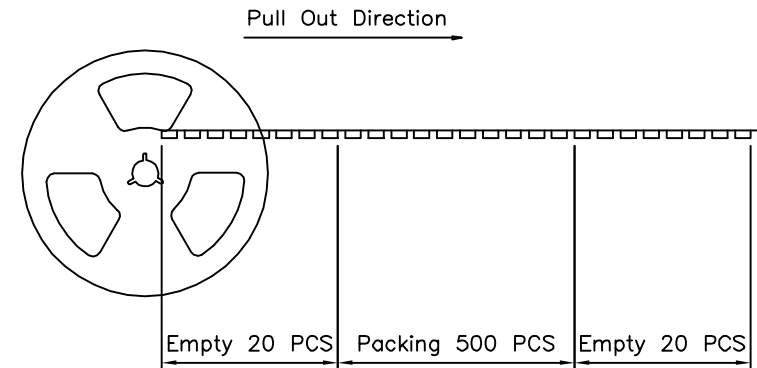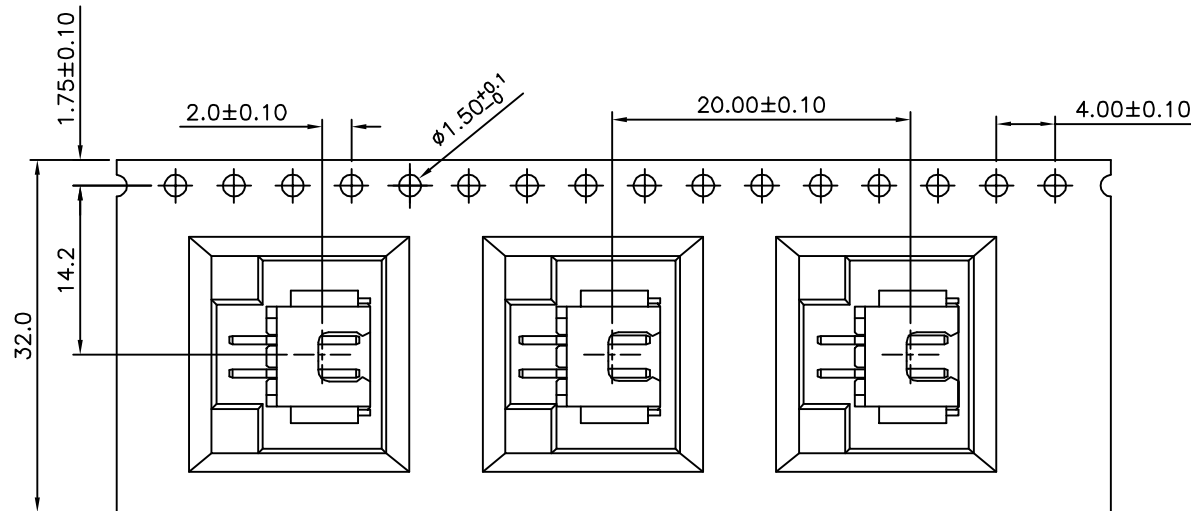

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19273

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.


A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.15

UNIT
mm



NO. REV.

A1

Modify Data

A0

NEW RELEASE

REVISIONS

CHK

DATE

HZF

02/18/2013

HZF

10/11/2010