

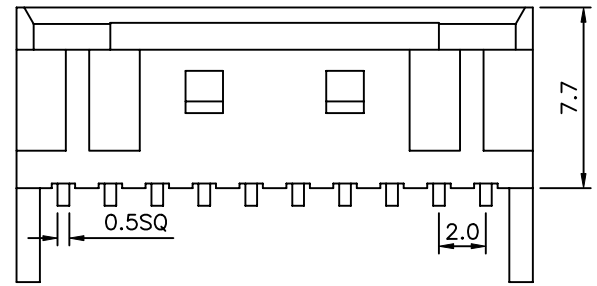
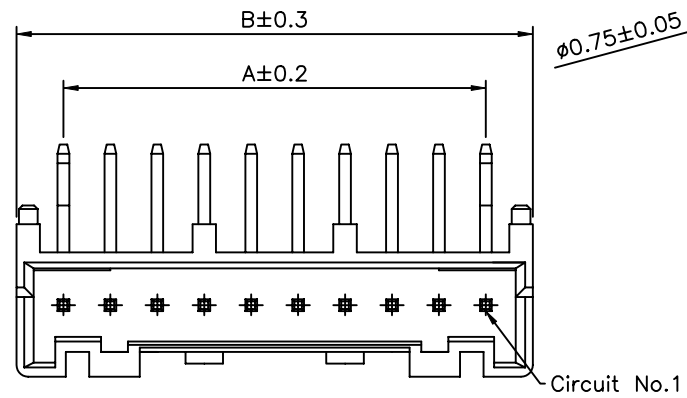
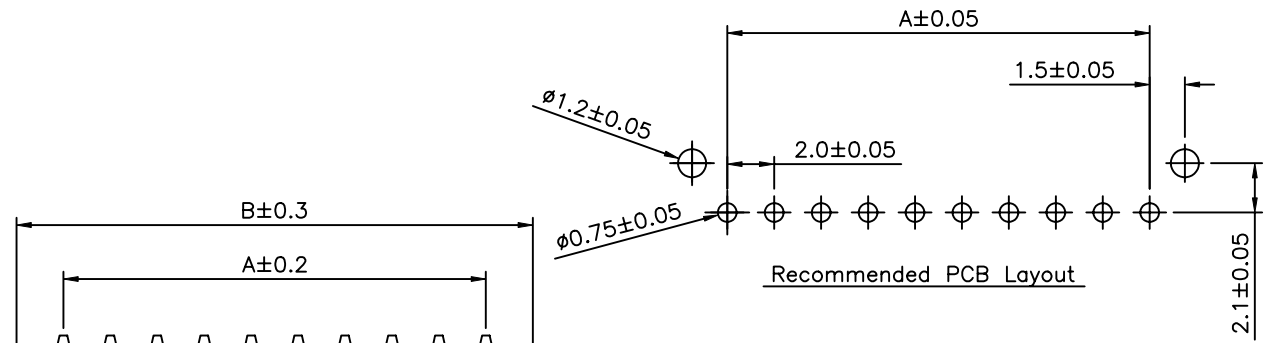



**SPECIFICATION**  
 Current Rating:3A AC/DC Max AWG#22  
 Voltage Rating:250V AC/DC  
 Withstand Voltage:800V AC/Minute  
 Contact Resistance:20Milliohms Max  
 Insulation Resistance:1000Megohms Min  
 Temperature Range:-25°C~+85°C  
 Pin Material:Brass,Tin-Plated  
 Wafer Material:Glass-Filled PBT UL94V-0 Natural  
 RoHS Compliant

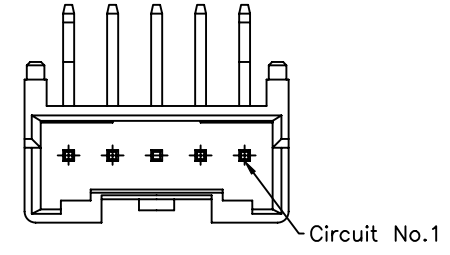

10~15 Circuits

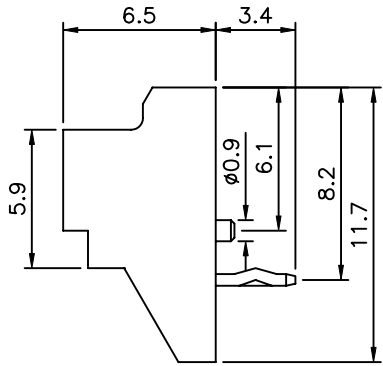

2~9 Circuits

No.	Dimension (mm)	
	A	B
2	2.0	6.0
3	4.0	8.0
4	6.0	10.0
5	8.0	12.0
6	10.0	14.0
7	12.0	16.0
8	14.0	18.0
9	16.0	20.0
10	18.0	22.0
11	20.0	24.0
12	22.0	26.0
13	24.0	28.0
14	26.0	30.0
15	28.0	32.0

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.20 ANG.
19323		MEI		
		CHECKED BY HZF		
		DRAWING BY HYY		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	05/20/2008