

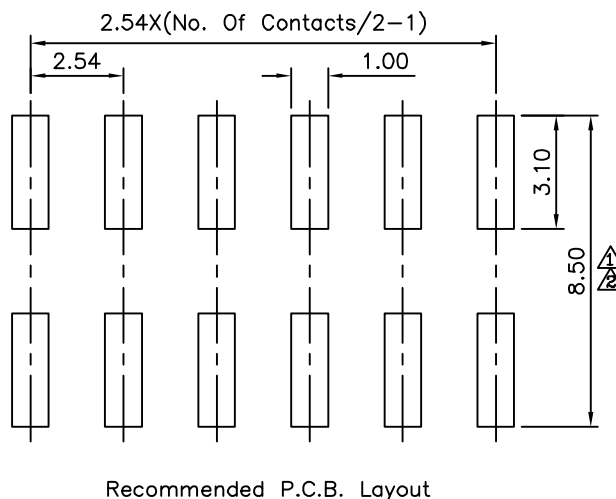
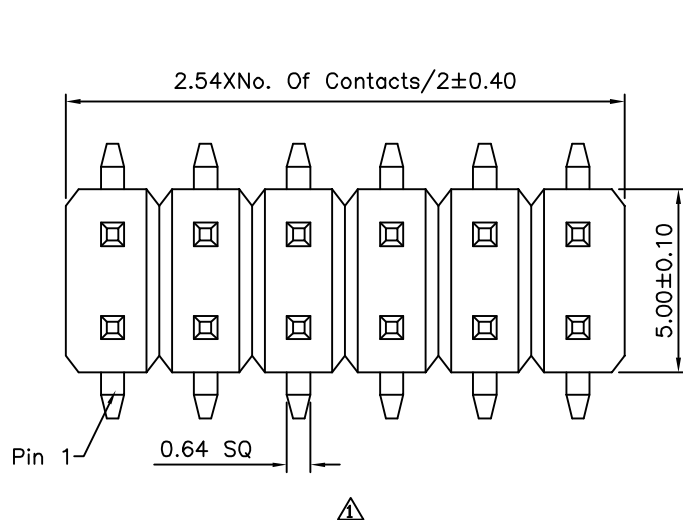


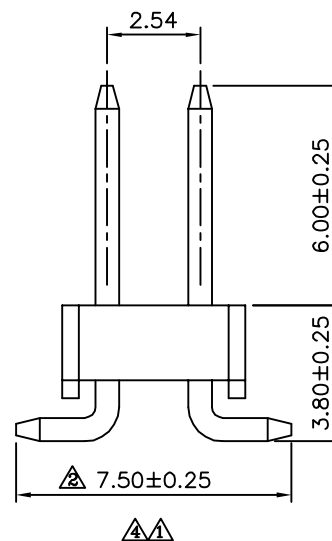

△ SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 △ No. Of Contacts:04~80 Contacts
 RoHS Compliant

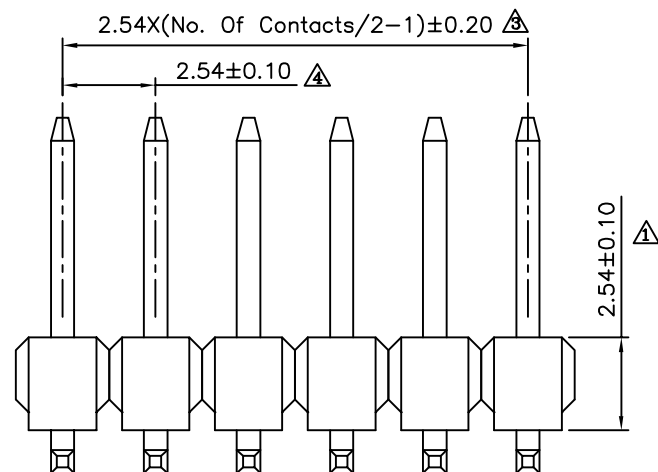

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19401

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

B4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ± 0.38
 .XX ± 0.25
 ANG. $\pm 5^\circ$

UNIT
 mm



NO. REV.

△ B4	Modify Data	HZF	05/13/2013
△ B3	Modify Data	HZF	12/08/2010
△ B2	Modify Data	HZF	07/16/2010
△ B1	Modify Data	HZF	12/18/2009
△ B0	NEW RELEASE	HZF	02/01/2009
REVISIONS		CHK	DATE

NO. REV.	REVISIONS	CHK	DATE
----------	-----------	-----	------