
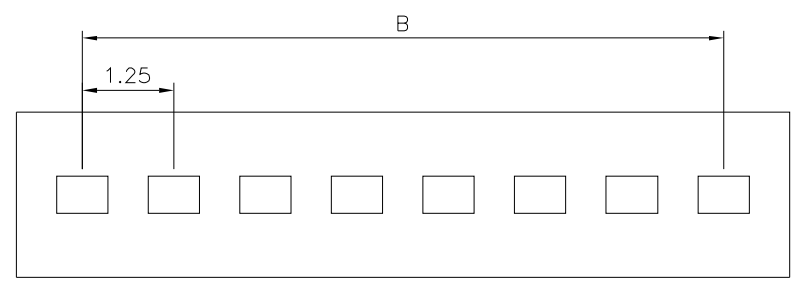



SPECIFICATION  
 Insulator:PA66(UL94V-0)  
 RoHS Compliant

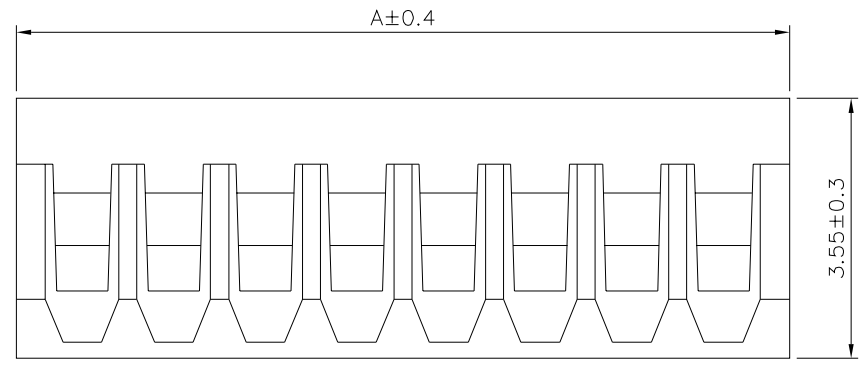

| Pin | A     | B     |
|-----|-------|-------|
| 02  | 3.05  | 1.25  |
| 03  | 4.30  | 2.50  |
| 04  | 5.55  | 3.75  |
| 05  | 6.80  | 5.00  |
| 06  | 8.05  | 6.25  |
| 07  | 9.30  | 7.50  |
| 08  | 10.55 | 8.75  |
| 09  | 11.80 | 10.00 |
| 10  | 13.05 | 11.25 |
| 11  | 14.30 | 12.50 |
| 12  | 15.55 | 13.75 |
| 13  | 16.80 | 15.00 |
| 14  | 18.05 | 16.25 |
| 15  | 19.30 | 17.50 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 19580  
 APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY CYP  
 SCALE NONE REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 0~10 ±0.2  
 10~20 ±0.3  
 20~40 ±0.4  
 40~ ±0.5  
 UNIT mm

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △   | A1   | Modify Data | HZF | 01/06/2015 |
| △   | A0   | NEW RELEASE | HZF | 11/23/2008 |