



△ SPECIFICATION


Current Rating:2.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
△ Insulator:PA9T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Plated Over Nickel
RoHS Compliant




Standard Layout

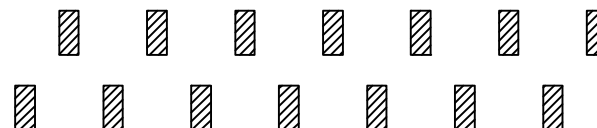

Standard Layout

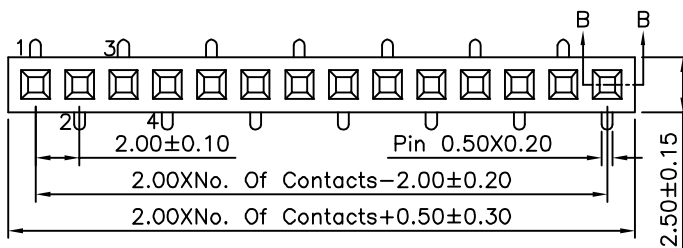


△ Reverse Layout

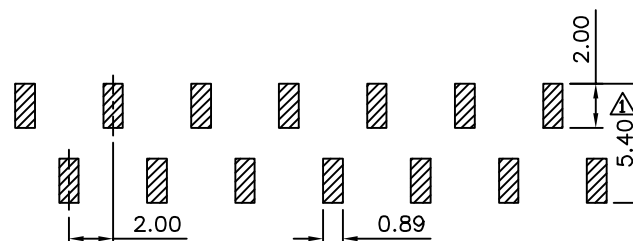


△ Reverse Layout

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

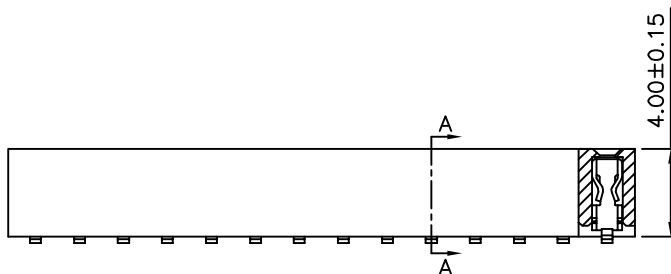

△ Section B-B

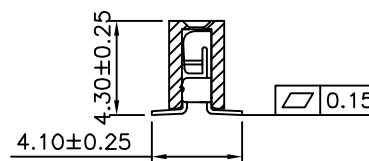

△ Section A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19694

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.40

.XX ±0.25

.XXX ±0.15

ANG. ±3°

UNIT
mm



	A2	Modify Data	HZF	03/07/2013
	A1	Modify Data	HZF	01/13/2010
	A0	NEW RELEASE	HZF	11/10/2007
NO.REV.	REVISIONS		CHK	DATE