

File No.	689NJ06801	SHEET	1/1

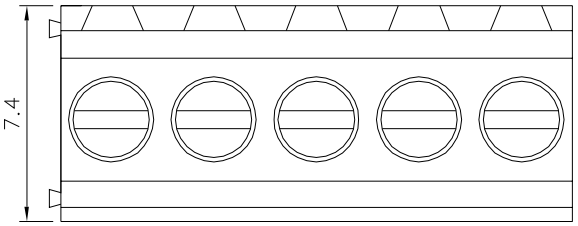


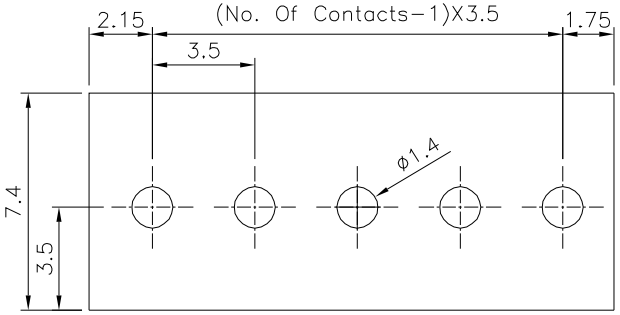


Recommended P.C.B. Layout

SPECIFICATION

Voltage Rating:300V AC
Current Rating:10A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC For 1 Minute
Test Time=60 Sec./1 Pcs
Wire Range:16~30AWG
Torque:2 Kgf.cm/M2
Operation Temperature:−40°C~+105°C
Soldring Reliability:Test Temperature=250°C±10°C
5 Seconds Max.
Contact(Metal Housing):Copper Alloy,Nickel Plated
Solder Pin:Copper Alloy,Tin Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Insulator Body(Housing):Polyamide(UL94V−0),Green
RoHS Compliant

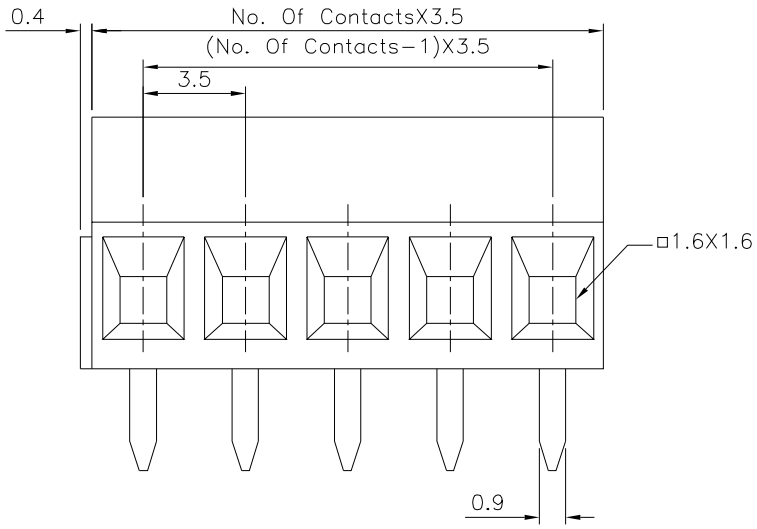

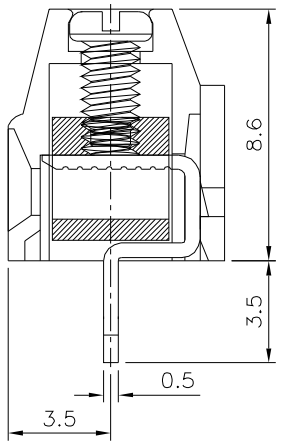

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	CHECKED BY	DRAWING BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
19715	MEI	HZF	CYP	X. ±0.50 .X ±0.30 .XX ±0.20 X° ±1°

SCALE	NONE	REV.	B0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	B0	Modify Data	HZF	09/21/2023
0	B0	NEW RELEASE	HZF	09/21/2023