
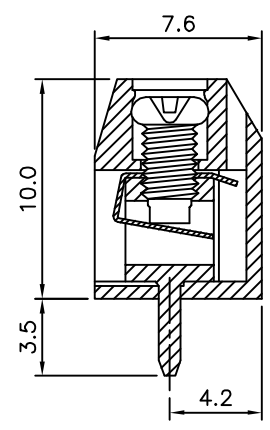
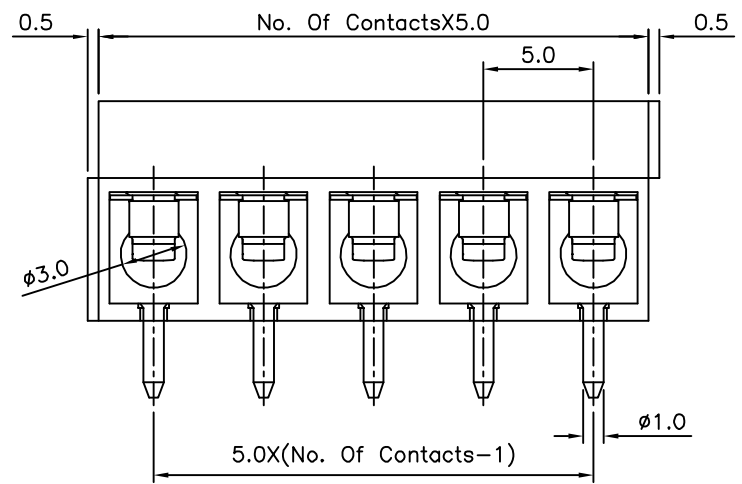


Recommended P.C.B. Layout

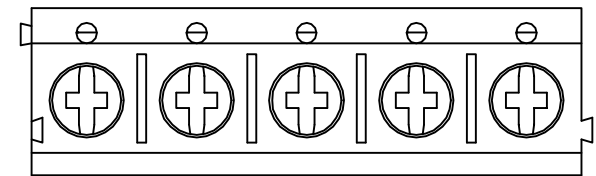

SPECIFICATION

Voltage Rating:250V AC
 Current Rating:15 Amps/Way Max.
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC(1 Minute),Test Time=60s/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature:250°C±10°C 5s Max.
 Torque:4.0 Kgf.cm/M2.5
 Wire Range:14~24 AWG
 Terminal:Copper Alloy,Tin Plated
 Screw:Steel,Galvanized With Cr3+ Plated
 Wire Guard:Stainless Steel
 Insulator Body(Housing):Polyamide(UL94V-0),Blue
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1° |
| 19866 | | MEI | | |
| | | CHECKED BY | | |
| | | HZF | | |
| | | DRAWING BY | | |
| | | HAO | | |
| SCALE | NONE | REV. | BO | UNIT |
| | | | | mm |

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ BO | | NEW RELEASE | HZF | 11/05/2015 |