

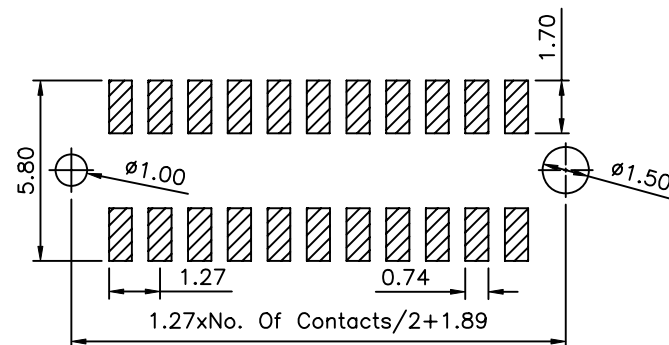


SPECIFICATION


Current Rating:1.0Amp
 Withstand Voltage:500V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 Insulator:PA6T+30%G.F. UL94V-0,Black
 RoHS Compliant

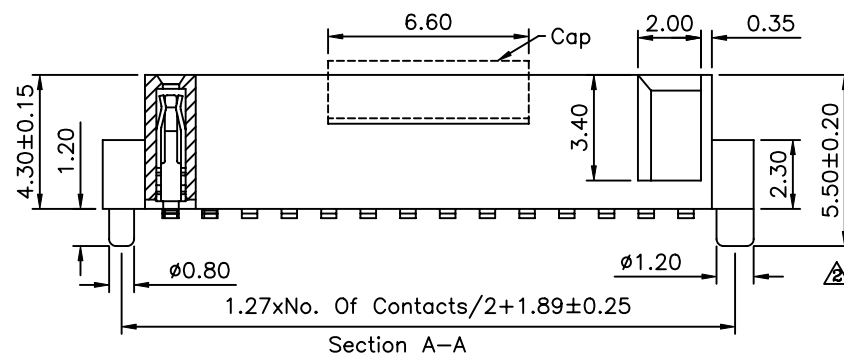

Recommended P.C.B Layout(Top Side)
 (PCB Board Tolerance±0.05)

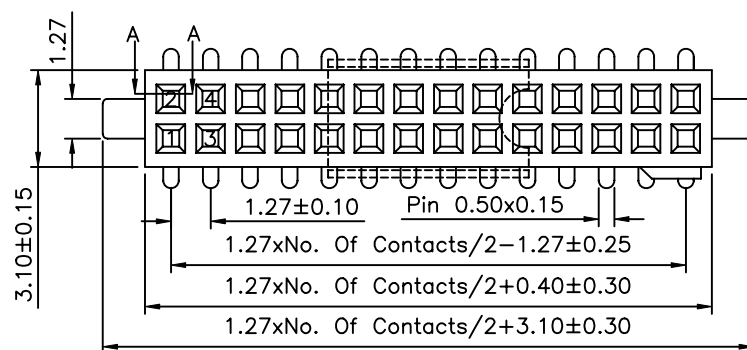

Section A-A

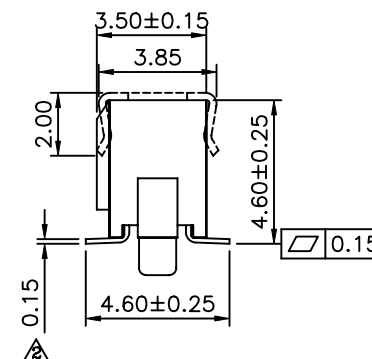

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

19905

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

LXX

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△A2		Add Dim	HZF	07/27/2009
△A1		Modify Data	HZF	06/22/2009
△A0		NEW RELEASE	HZF	09/27/2008