

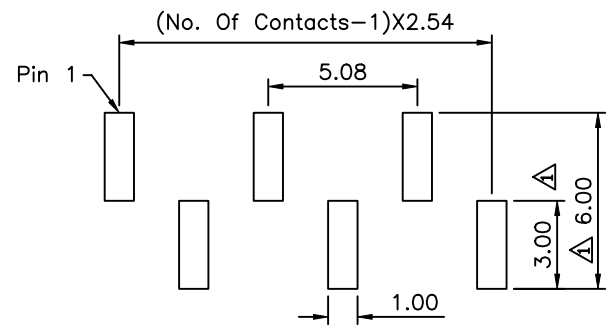
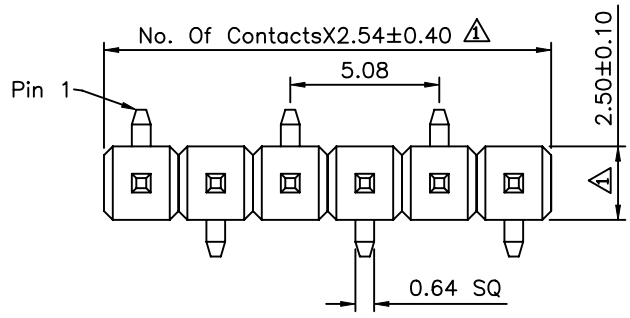


△ SPECIFICATION
 Current:3A
 Operation Temperature:-55°C~+105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Hosuing:PA6T(UL94V-0),Black
 Contact:Copper Alloys,Gold Flash
 RoHS Compliant

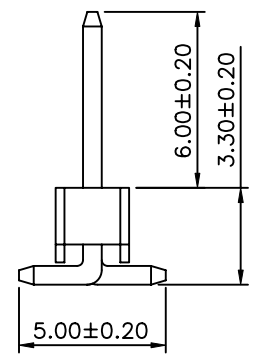

Recommended P.C.B. Layout

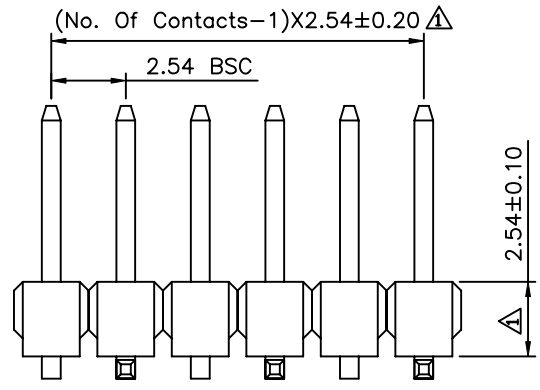

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
19981		MEI		TOLERANCES ARE					
		CHECKED BY		.X ±0.38					
		HZF		.XX ±0.25					
		DRAWING BY		ANG: ±5°		△ A1	Modify Data	HZF	07/19/2010
		QQJ				△ A0	NEW RELEASE	HZF	01/18/2008
SCALE	NONE	REV.	A1	UNIT	mm	NO. REV.	REVISIONS	CHK	DATE