
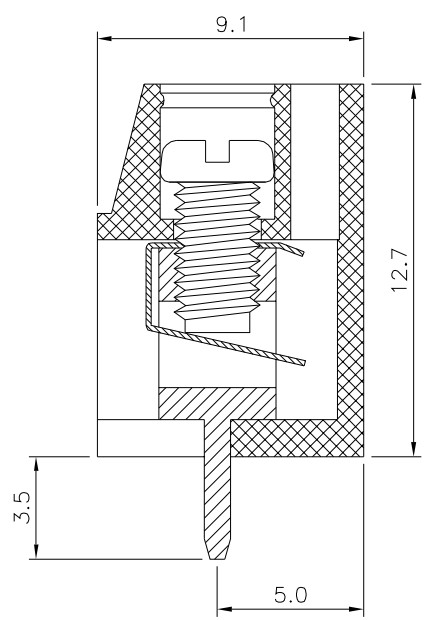


Recommended P.C.B. Layout

SPECIFICATION

Current Rating:15A/Way Max.
 Voltage Rating:250V AC
 Contact Resistance:20 Milliohms Max.
 Withsand Voltage:2500V AC(1 Minute)
 Test Time=60 Sec./1Pcs
 Wire Range:14~24 AWG
 Operation Temperature:-40°C~+105°C
 Torque:4.0 Kgf.cm/M3.0
 Insulator Body(Housing):Polyamide(UL94V-0),Blue
 Terminal:Copper Alloy,Tin Plated
 Screw:Steel,Galvanized With Cr3+ Plated
 Wire Guard:Stainless Steel
 RoHS Compliant

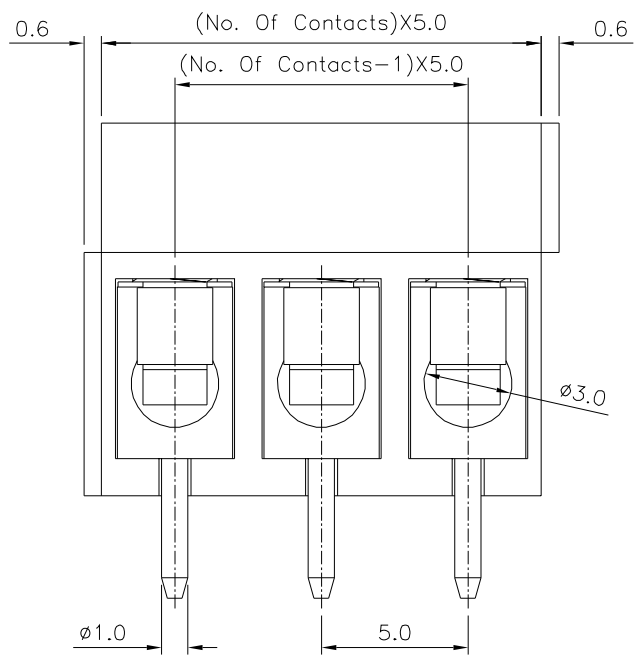

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
20004		EMILY		
		HZF		
		DRAWING BY		UNIT mm
		SAN		
SCALE	NONE	REV.	BO	

NO.	REV.	REVISIONS	CHK	DATE
△	B0	NEW RELEASE	HZF	10/17/2023