
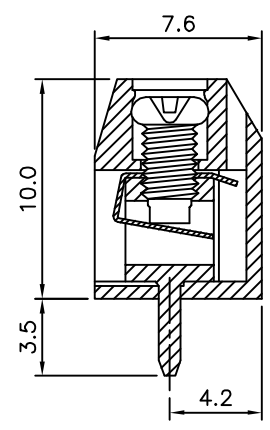
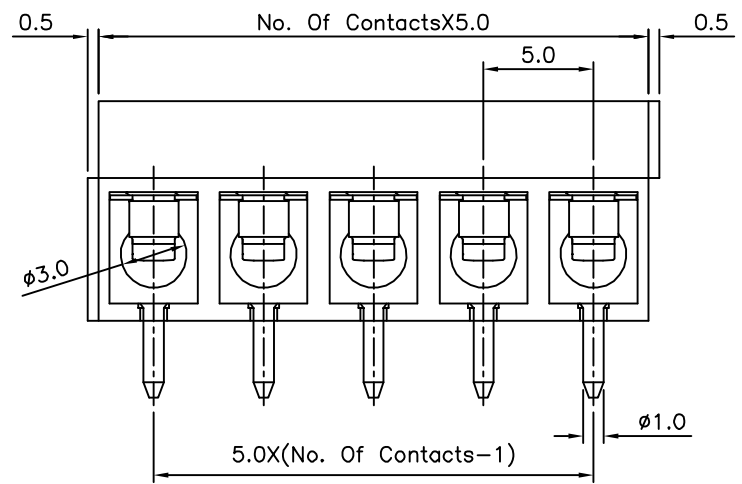


Recommended P.C.B. Layout

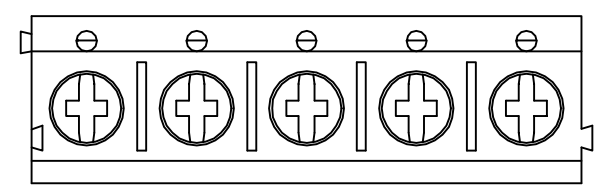

SPECIFICATION

Voltage Rating:250V AC
 Current Rating:15 Amps/Way Max.
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC(1 Minute),Test Time=60s/1 PCS
 Operation Temperature:-40°C~+105°C
 Soldering Reliability:Test Temperature:250°C±10°C 5s Max.
 Torque:4.0 Kgf.cm/M2.5
 Wire Range:14~24 AWG
 Terminal:Copper Alloy,Tin Plated
 Screw:Steel,Galvanized With Cr3+ Plated
 Wire Guard:Stainless Steel
 Insulator Body(Housing):Polyamide(UL94V-0),Blue
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
20018		MEI		
		CHECKED BY HZF		
		DRAWING BY HAO		
SCALE	NONE	REV.	BO	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ BO		NEW RELEASE	HZF	11/05/2015