


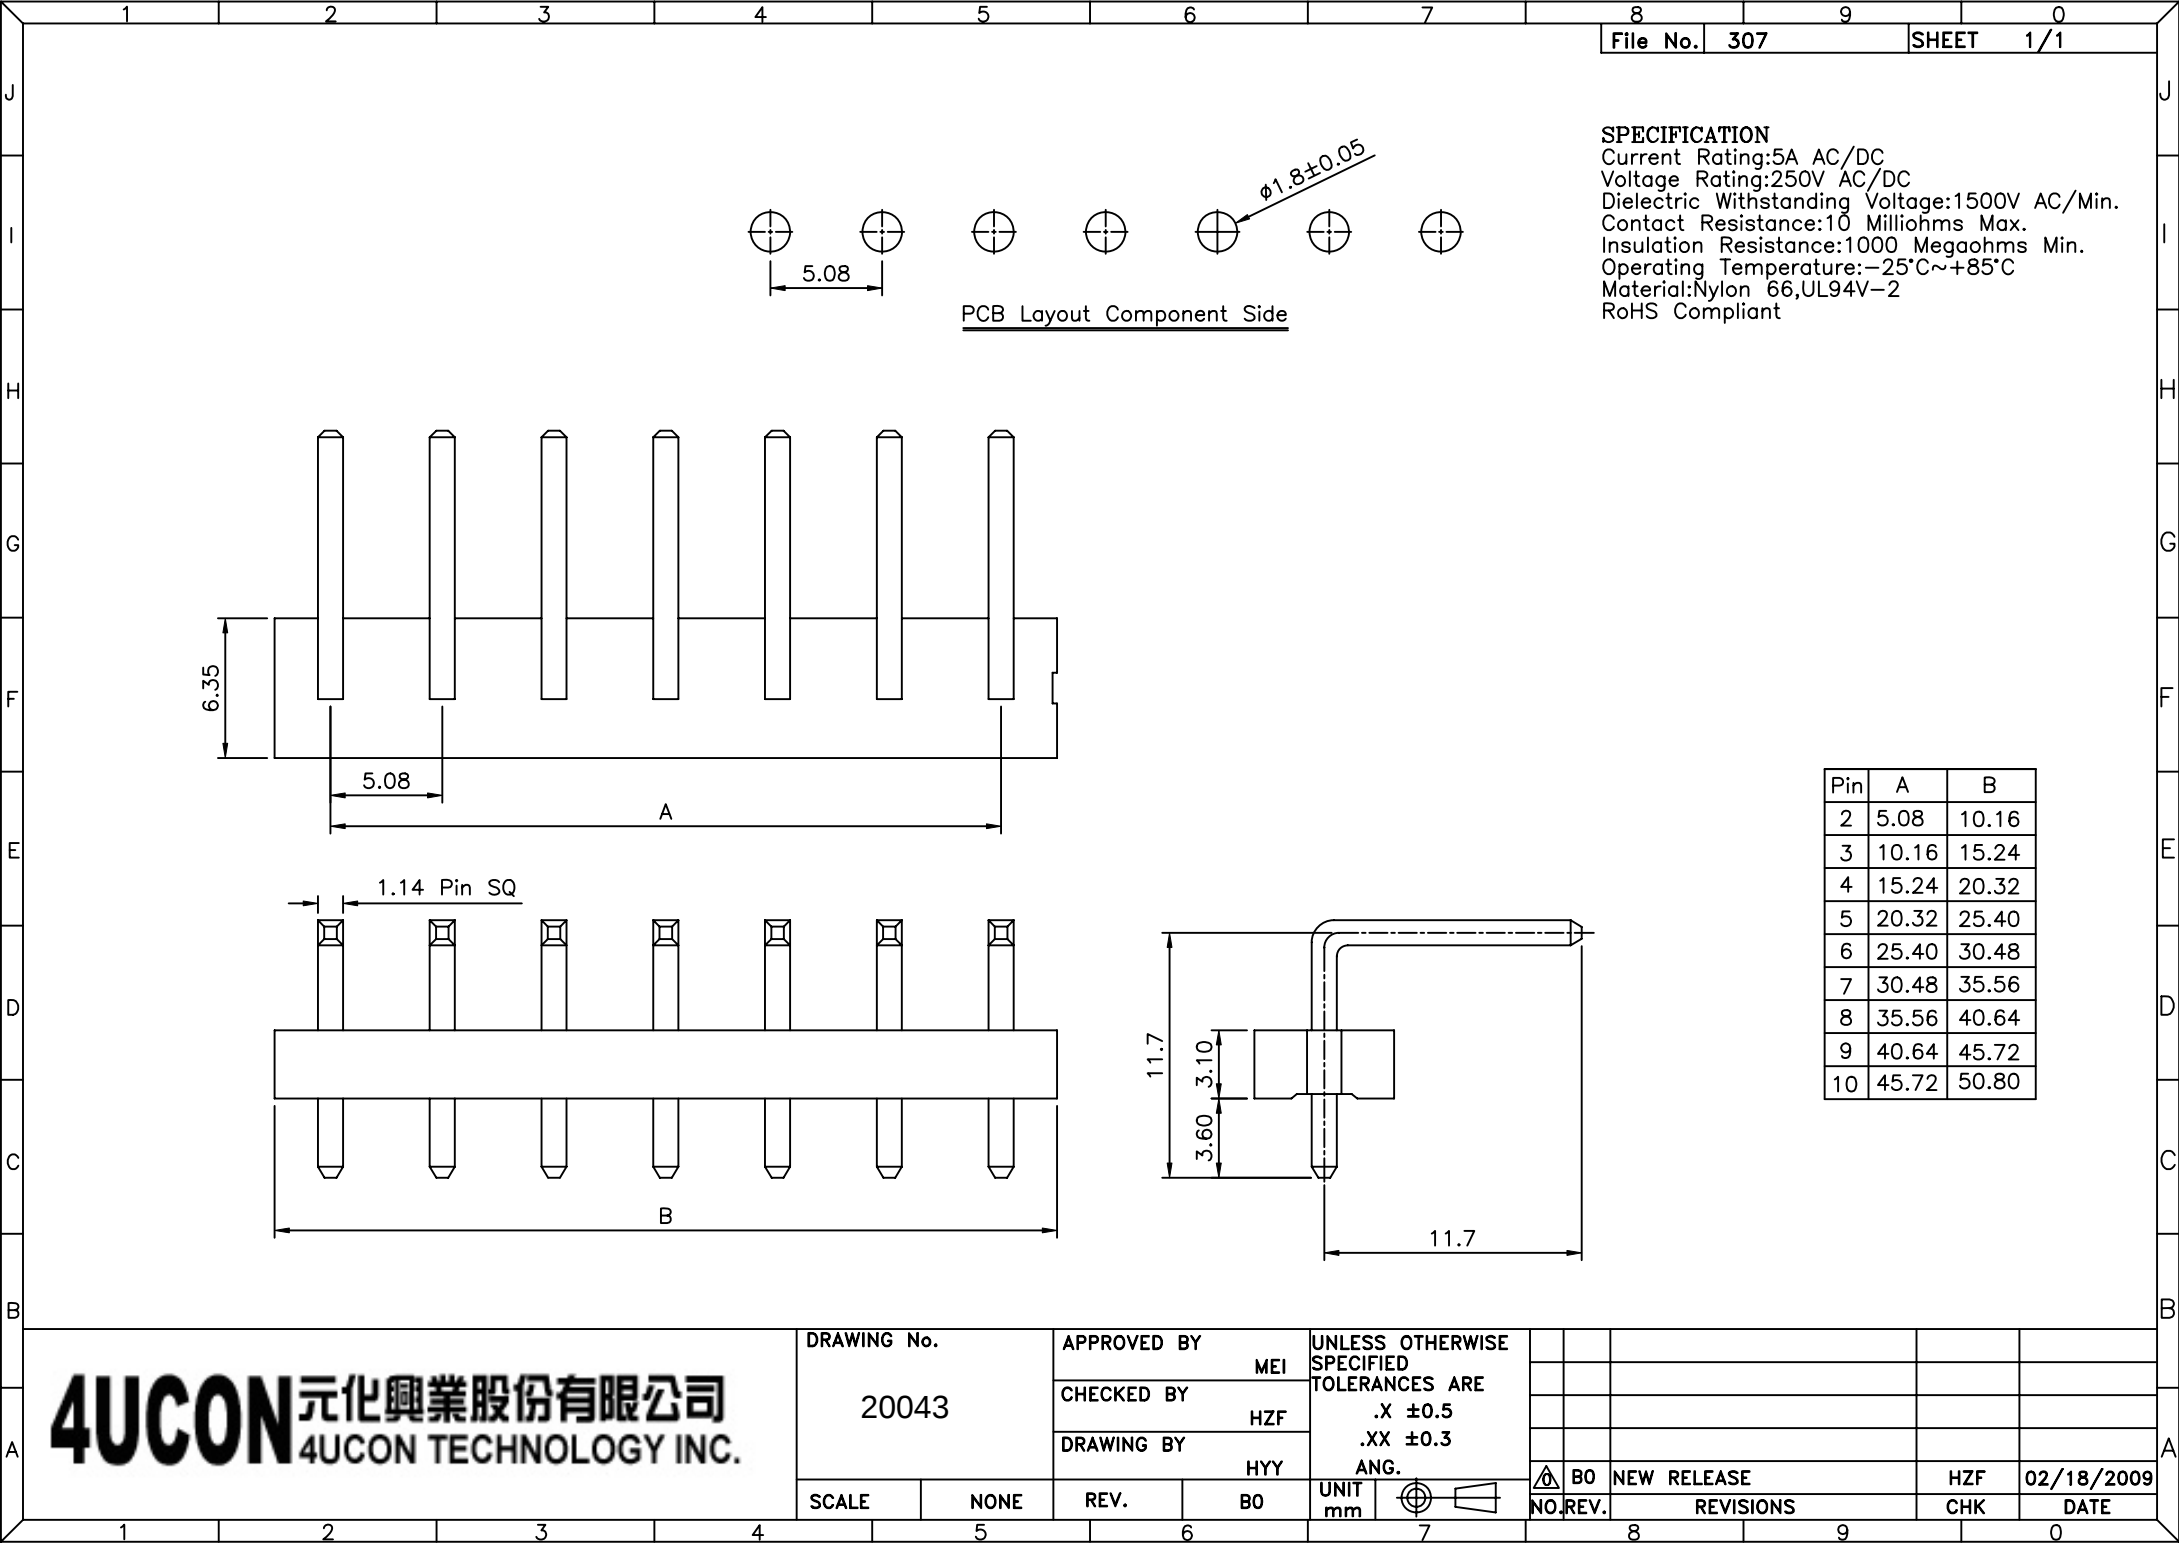

SPECIFICATION
Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Dielectric Withstanding Voltage:1500V AC/Min.
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-25°C~+85°C
Material:Nylon 66,UL94V-2
RoHS Compliant

PCB Layout Component Side

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
20043


APPROVED BY MEI
CHECKED BY HZF
DRAWING BY HYY

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ± 0.5
.XX ± 0.3
ANG.

SCALE NONE

REV. BO

UNIT mm



NO.	REV.	BO	NEW RELEASE	HZF	02/18/2009
			REVISIONS	CHK	DATE