
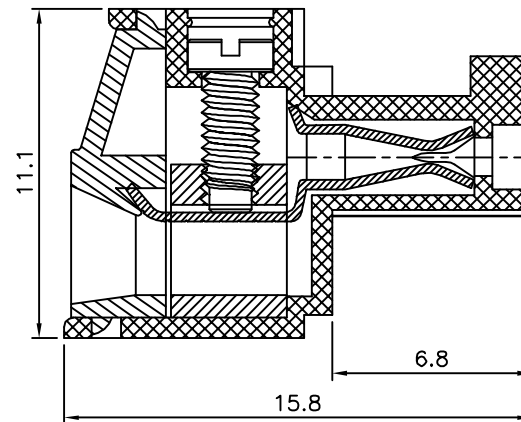
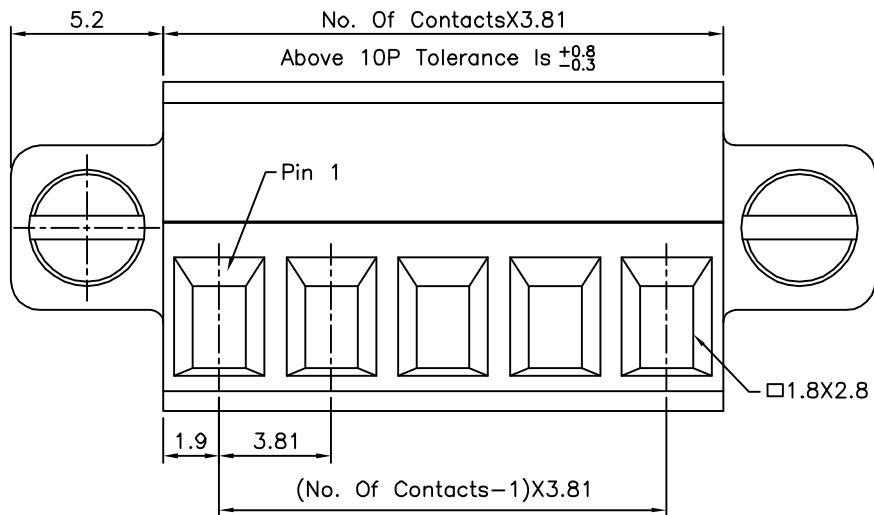


SPECIFICATION

Current Rating:12 Amp/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Test Time=60 Sec./1PCS
Contact Resistance:20 Milliohms Max.
Wire Range:16~24 AWG
Torque:2.5 Kgf.cm/M2
Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.
Contact(Metal Housing):Copper Alloy,Nickel Plated
Wire Guard:Copper Alloy,Tin Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

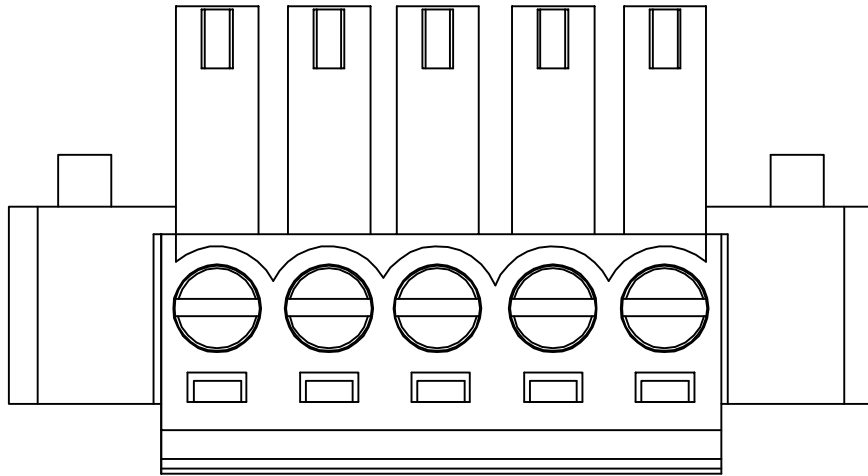

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

20046

SCALE	NONE
-------	------

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
	X.	±0.50
	.X	±0.30
	.XX	±0.20
	X.	±1

UNIT	
mm	

	B0
NO.	REV.

NEW RELEASE

REVISIONS

HZF

11/11/2014

CHK

	DATE
--	------