

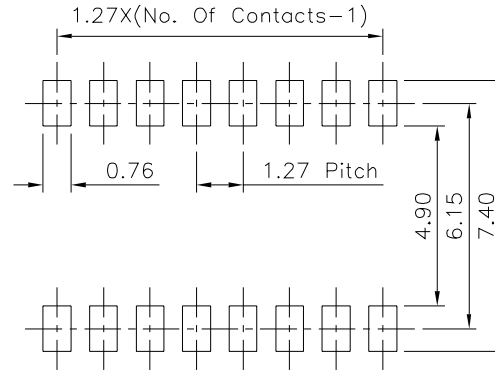
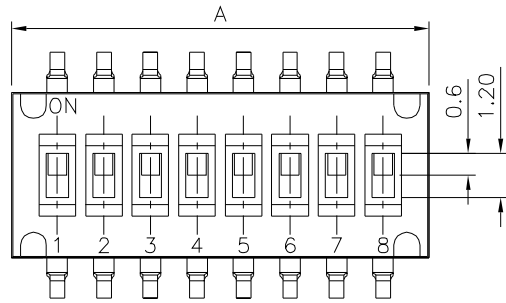


SPECIFICATION


Current Range:
 Non-Switching:100mA 50V DC
 Switching:25mA 24V DC
 Dielectric Withstanding Voltage:300V AC For One Minute
 Contact Resistance:100 Milliohms Max.(Initial)
 Insulation Resistance:100 Megaohms Min.
 At 500V DC,60s±5s
 Operation Temperature Range:-40°C~+85°C
 Storage Temperature Range:-40°C~+85°C
 Capacitance:5pF Max. At 1 MHz±10 KHz
 RoHS Compliant



Recommended P.C.B. Layout

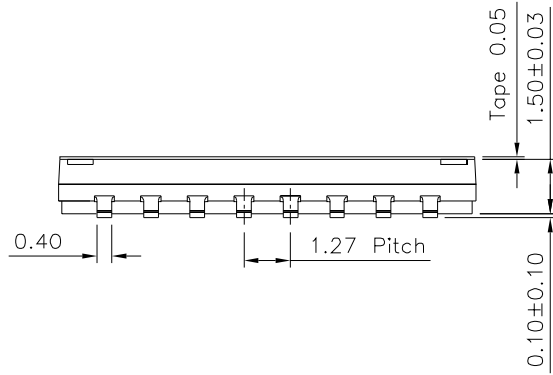

Pin	A
2	3.77
4	6.31
6	8.85
8	11.39
10	13.93

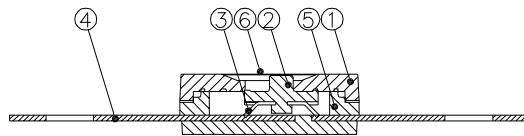

Item	Description	Q'ty	Material	Remark
①	Cover	1	HTN,UL94V-0	Black
②	Actuator		LCP,UL94V-0	White
③	Contact		Phosphor Bronze	Gold Plated Over Nickel
④	Terminal		Brass	Gold Plated Over Nickel
⑤	Base	1	HTN,UL94V-0	Black
⑥	Tape		Katpon	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20122

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.2
 .XX ±0.2
 .XXX ±0.2
 ANG.

UNIT

mm



① B1 Modify Data HZF 10/23/2018

② B0 NEW RELEASE HZF 01/22/2013

NO.REV. REVISIONS CHK DATE