
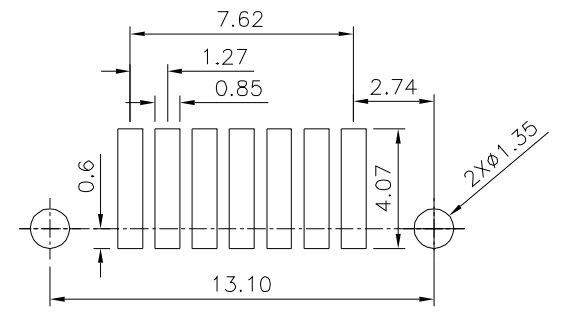
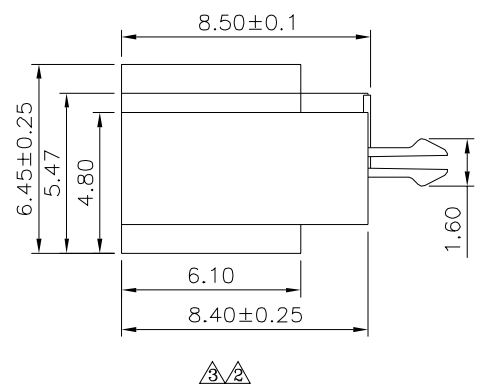
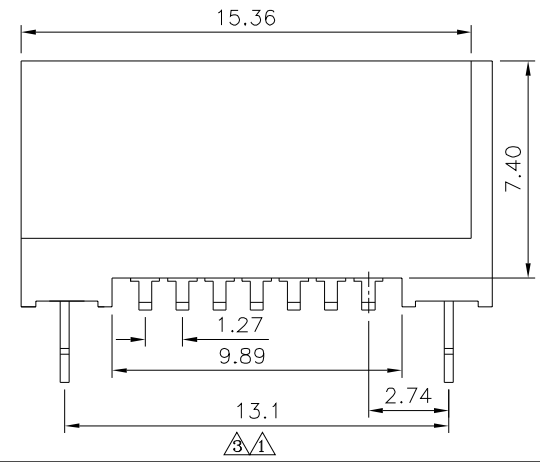
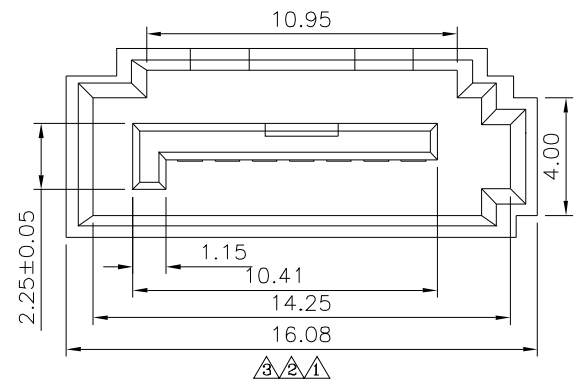


△△ SPECIFICATION
 Current Rating:1.5 A
 Operation Voltage:100V AC Max.
 Dielectric Withstand Voltage:500V AC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:LCP+30%G.F.(UL94V-0),Black
 Contact:Brass
 Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 Peg:Brass,Tin Plated On Solder Tails Over Nickel
 RoHS Compliant

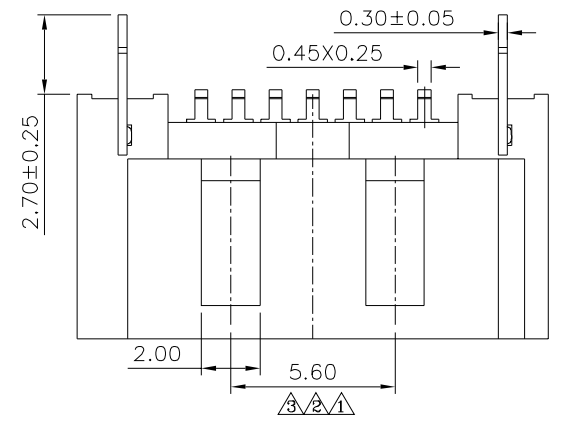

△△ Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 △ X.* ±2* .X ±0.20 △ .X* ±1.5* .XX ±0.15 △ .XX* ±1* .XXX ±0.10 △ .XXX* ±0.5*				
20185		MEI			△ A3	Modify Data	HZF	10/06/2015
		CHECKED BY			△ A2	Modify Data	HZF	02/27/2013
		DRAWING BY		△ A1	Modify Data	HZF	10/11/2011	
		CYP		△ A0	NEW RELEASE	HZF	02/25/2011	
SCALE	NONE	REV.	A3	UNIT	mm			

NO.	REV.	REVISIONS	CHK	DATE