




Recommended P.C.B. Layout

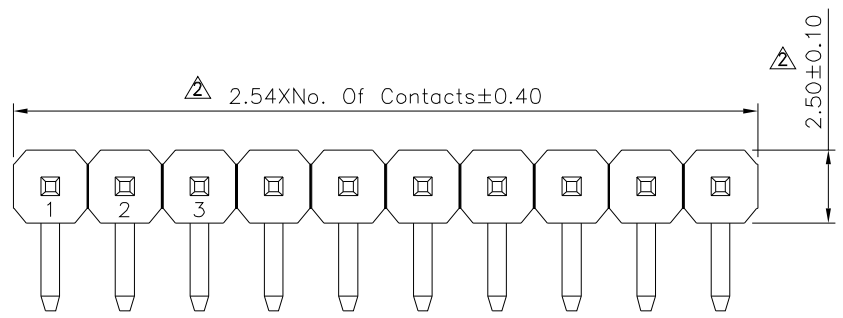

⚠

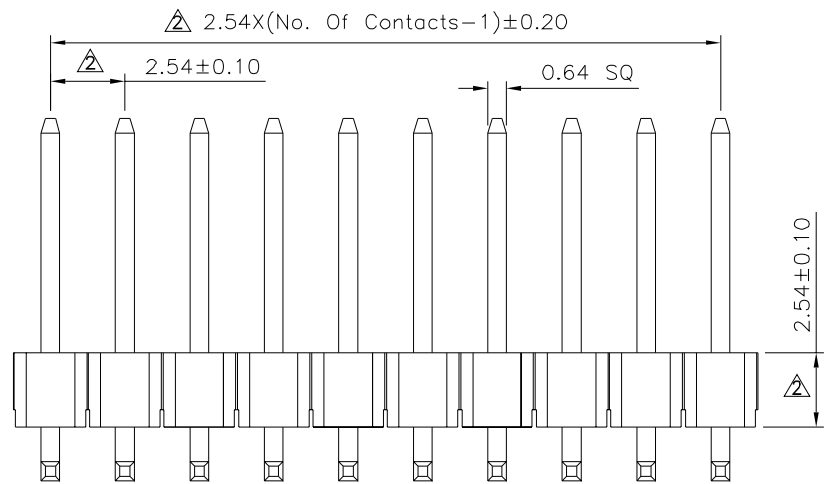

⚠

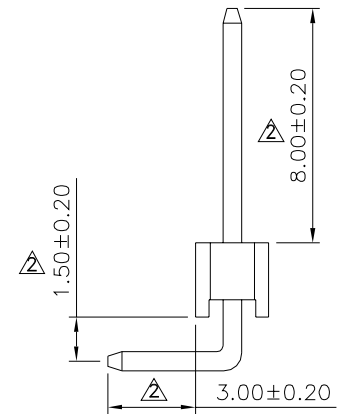

⚠

△ SPECIFICATION

- Current Rating:3A
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Withstanding Voltage:1000V AC/Minute
- △ Operating Temperature:-40°C To +105°C
- Housing:PBT(UL94V-0),Black
- △ Contact:Brass,Gold Flash Over Nickel
- No. Of Contacts:1~40 Contacts
- RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. ⚠  
**20249**


APPROVED BY EMILY  
CHECKED BY HZF  
DRAWING BY HTP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
.X ±0.38 ⚠  
.XX ±0.25  
.XXX ±0.05  
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A3	Modify Data	HZF	10/07/2024
⚠	A2	Modify Data	HZF	02/18/2012
⚠	A1	Modify Data	INGRID	08/15/2007
⚠	A0	NEW RELEASE	SHIN	08/06/2006

SCALE NONE

REV. A3



NO. REV. REVISIONS CHK DATE