


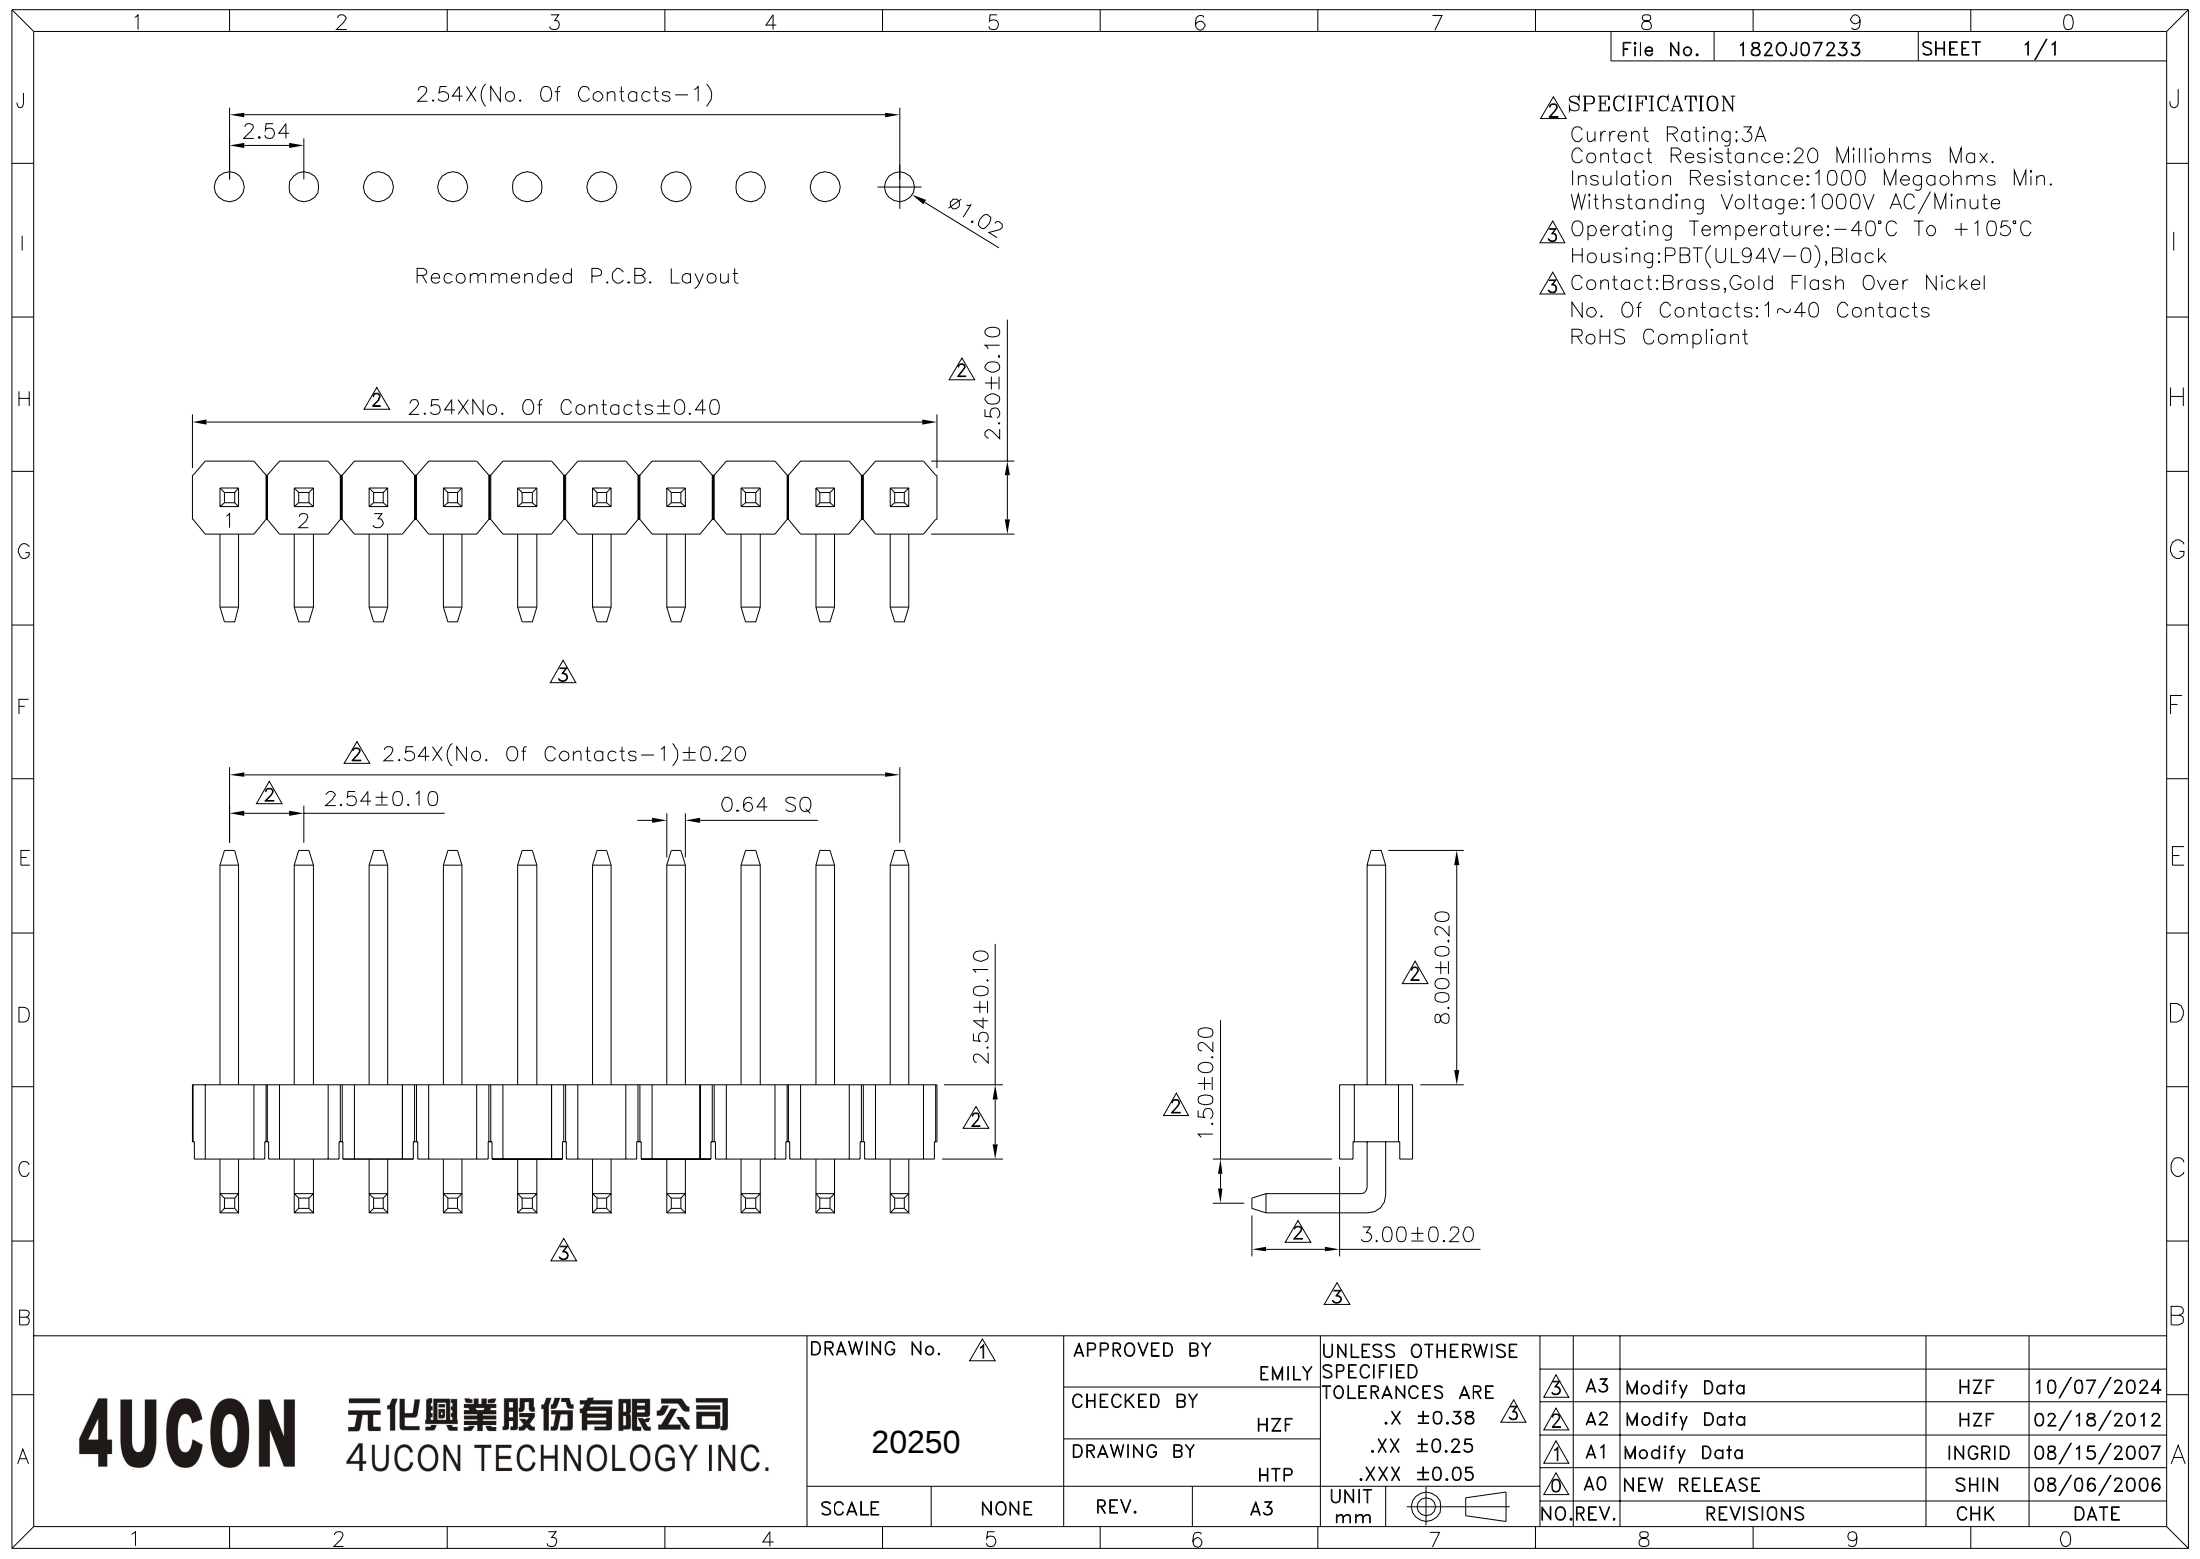

SPECIFICATION
Current Rating:3A
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:1000V AC/Minute
Operating Temperature:-40°C To +105°C
Housing:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:1~40 Contacts
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. 20250		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX ±0.05								
		EMILY				3	A3	Modify Data		HZF	10/07/2024	
		CHECKED BY				2	A2	Modify Data		HZF	02/18/2012	
		HZF				1	A1	Modify Data		INGRID	08/15/2007	
		DRAWING BY				0	A0	NEW RELEASE		SHIN	08/06/2006	
SCALE		NONE		REV.	A3	UNIT	NO. REV.		REVISIONS		CHK	DATE
						mm						