
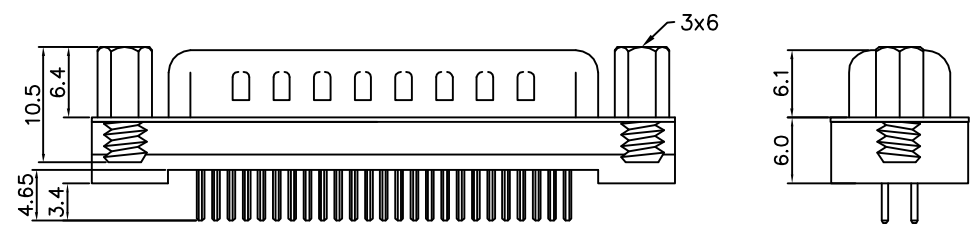


Recommended PCB Layout

SPECIFICATION

Current Rating: 3 AMP
 Volatge Rating: 250 VAC/Rms 60Hz
 Contact Resistance: 20 Milliohms Max At 3 Amp DC
 Insulation Resistance: 1000Megohm At 500 V DC
 Dielectric Withstanding Voltage:
 1000 VAC/Rms 60Hz For 1 Minute
 Insulator: Glass-Filled Thermoplastic PBT,UL94V-0 Rated
 Contact: Brass
 Shell: Steel,Tin Over Copper
 Clinch Nut: Brass,Nickel Plated.
 Boardlock: Brass,Tin Plated.
 Screwlock: Brass,Nickel Plated.
 RoHS Compliant

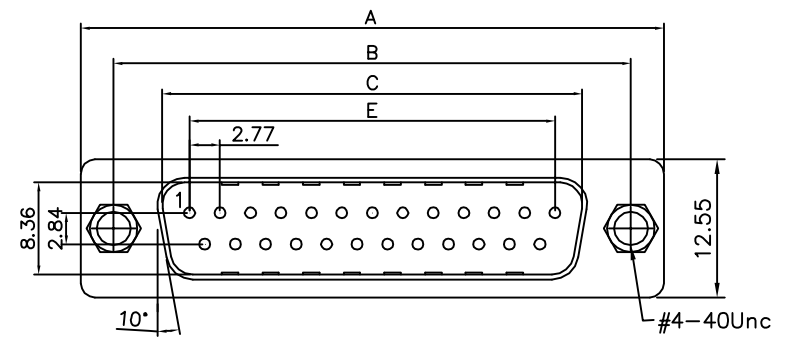

Positions	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.38 X.* ±3° .X ±0.25 .X* ±1.0° .XX ±0.13					
20251		MEI							
		CHECKED BY							
		DRAWING BY							
SCALE	NONE	REV.	A0	UNIT	mm	△ A0	NEW RELEASE	HZF	12/02/2007
						NO.REV.	REVISIONS	CHK	DATE