
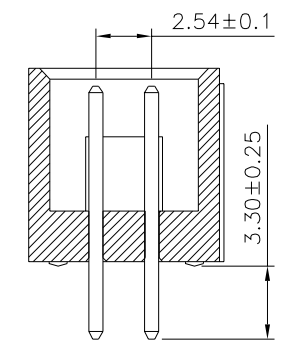
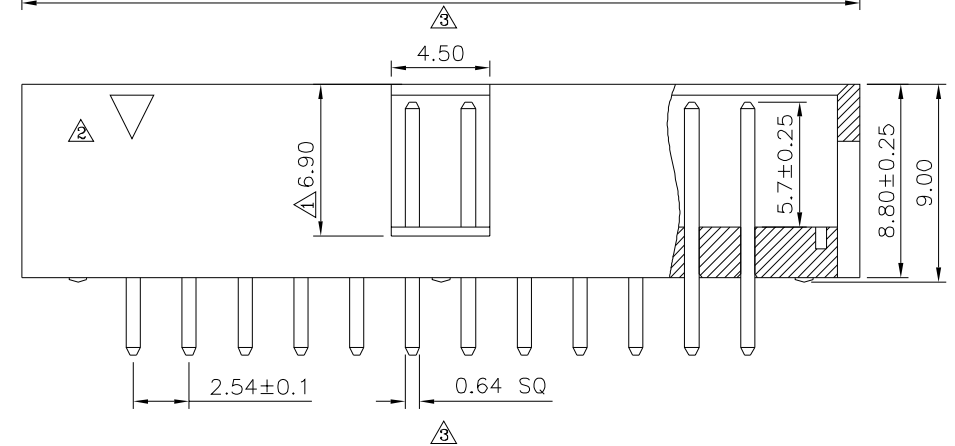


Recommended P.C.B. Layout
Tolerance: ±0.05 (Top View)

SPECIFICATION
 Current Rating: 3 Amp
 Withstand Voltage: 1000V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Insulator: PBT(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

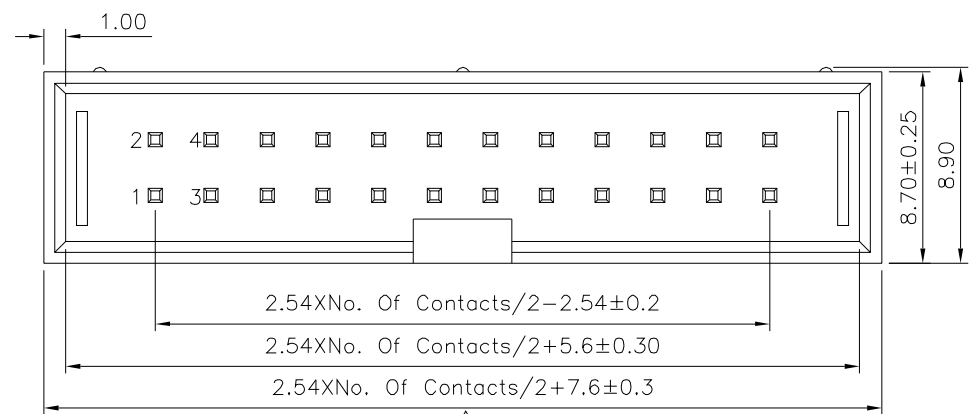

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 20253		APPROVED BY EMILY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X: ±0.25 X*: ±2* △ XX: ±0.20 XX*: ±1.5* △ XXX: ±0.1 XXX*: ±0.5*	△ A4	Modify Data	HZF	01/10/2023
		CHECKED BY HZF			△ A3	Modify Data	HZF	04/17/2015
		DRAWING BY HAO			△ A2	Modify Data	HZF	11/20/2013
SCALE	NONE	REV.	A4	UNIT mm	△ A1	Modify Data	HZF	09/03/2013
				UNIT mm	△ A0	NEW RELEASE	HZF	12/14/2010
				NO. REV.	REVISIONS		CHK	DATE



UNIT mm

NO. REV.	REVISIONS	CHK	DATE
----------	-----------	-----	------