


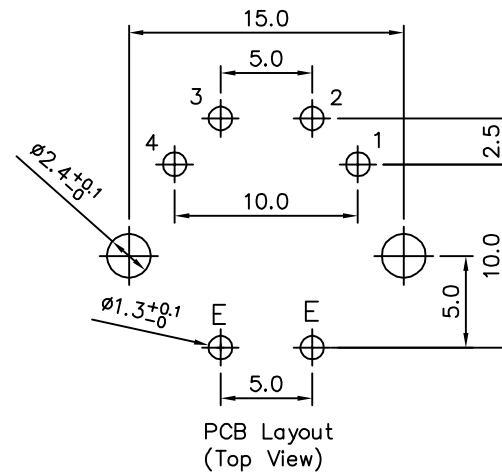

SPECIFICATION

Current Rating: AC 100V 2A

DC 24V 1A

Voltage Withstanding: 500V AC 1 Minute

Contact Resistance: 20 Milliohms Max.

Insulation Resistance:100 Megaohms Min. At DC 500V



Insertion Force: 5.0Kg Max.

Withdrawal Force: 0.6~3.0Kg

Life Test: 5000 Cycles Min. After Testing, Contact

Resistance Shall Not Exceed 100Milliohms

RoHS Compliant

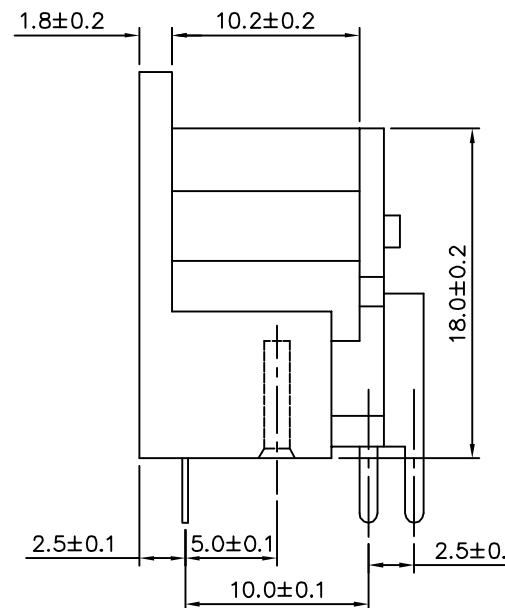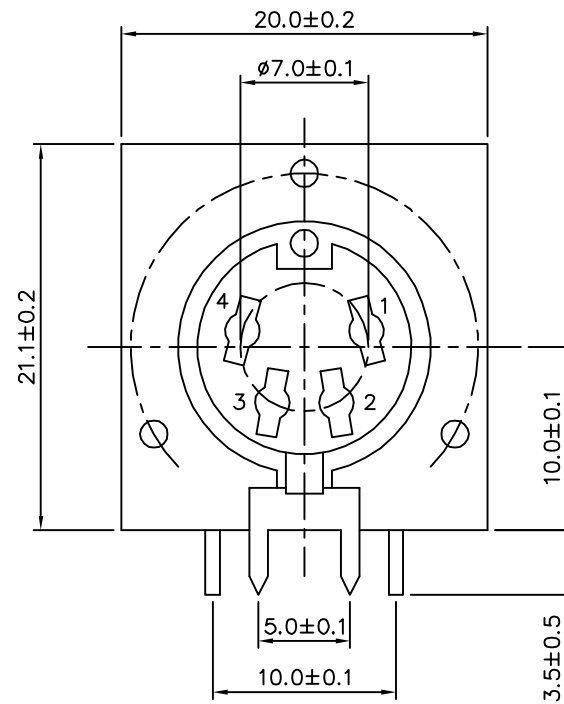

No.	Part Name	Q'ty	Material	Remark
1	Body	1	PBT	UL94V-0
2	Earth Terminal	1	PBSR-H	Tin Plated
3	Plate	1	Bakelite	
4	Contactor	4	BSR-0.5H	Tin Plated

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20301

SCALE

NONE

APPROVED BY

MEI

CHECKED BY	
------------	--

HZF

DRAWING BY

LXX

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$.X \pm 0.38$

.XX ± 0.25

	UNIT mm
--	------------



△	AO
NO.	REV.

	NEW RELEASE
--	-------------

REVISIONS

HZF

06/26/2009	
------------	--

CHK

	DATE
--	------