

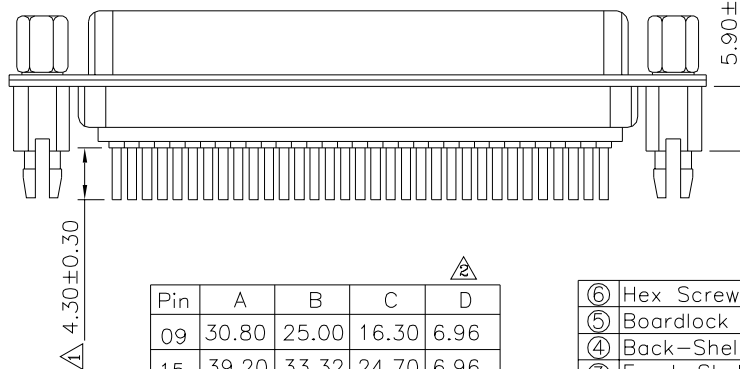
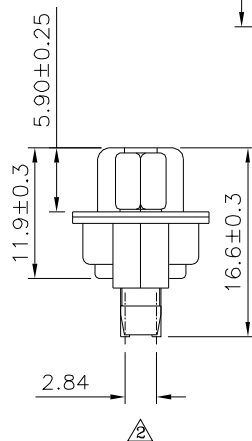
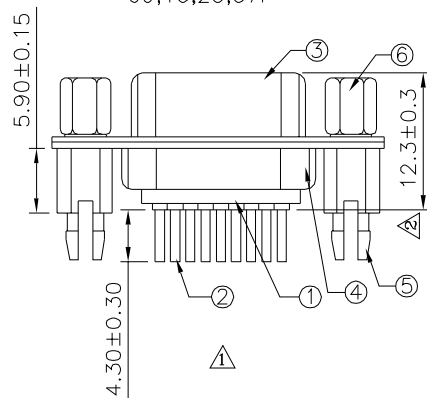
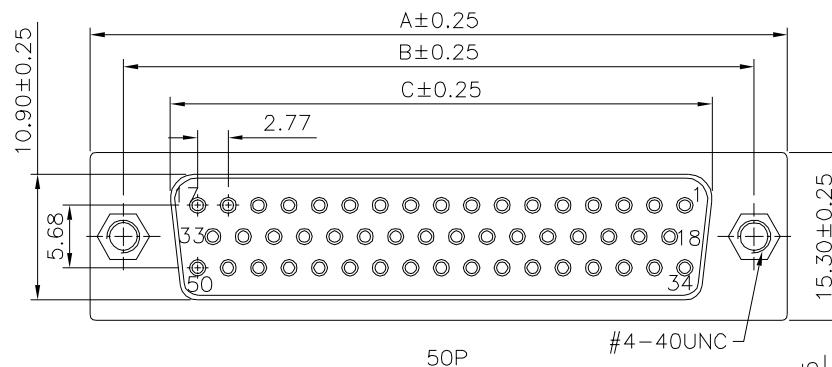
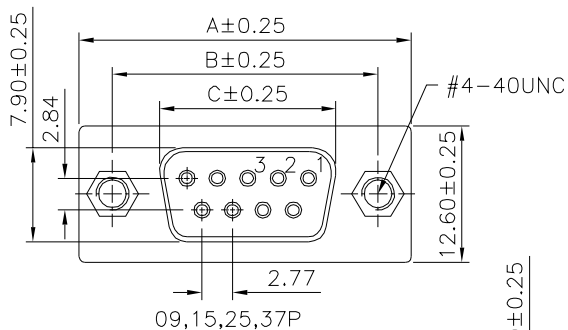
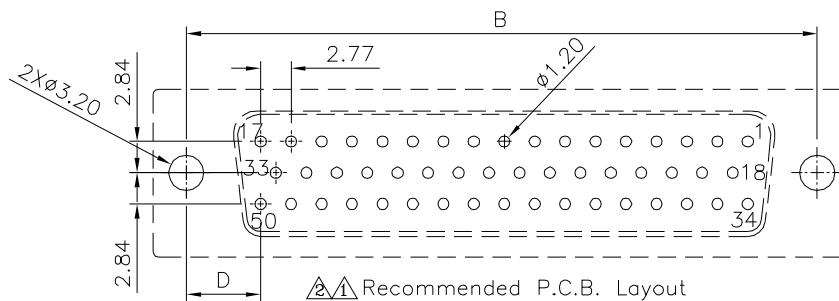


△ SPECIFICATION
Current Rating:1A Max.
Dielectric Withstanding Voltage:500V AC
For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At DC 500V
Temperature Range:-55°C~+105°C
RoHS Compliant

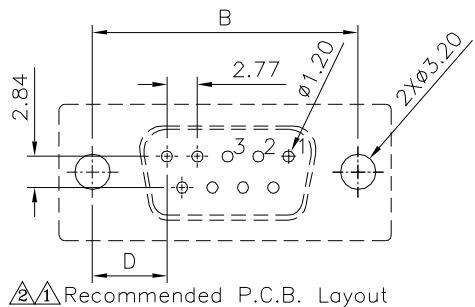

Pin	A	B	C	D
09	30.80	25.00	16.30	6.96
15	39.20	33.32	24.70	6.96
25	53.05	47.04	38.40	6.90
37	69.40	63.50	54.80	6.82
50	67.10	61.00	52.20	8.34

⑥	Hex Screw	2	Brass	Nickel Plated
⑤	Boardlock	2	Brass	Tin Plated
④	Back-Shell	1	Steel	Tin Plated
③	Front-Shell	1	Steel	Tin Plated
②	Contact	1	Brass	Gold Plated On Contac Area,Tin Plated On Solder Tails,Over Nicke
①	Housing			2
No.	Description	Q'ty	Material	Remark

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

20357

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±1°

UNIT
mm



△	A2	Modify Data	HZF	12/08/2023
△	A1	Modify Data	HZF	04/02/2015
△	A0	NEW RELEASE	HZF	03/18/2012
NO.	REV.	REVISIONS	CHK	DATE