

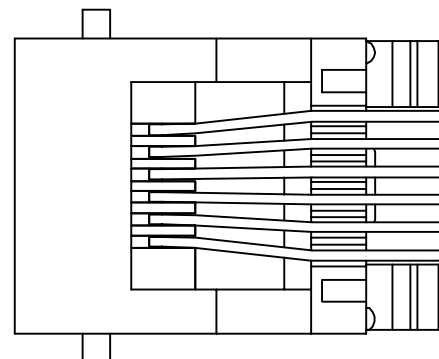
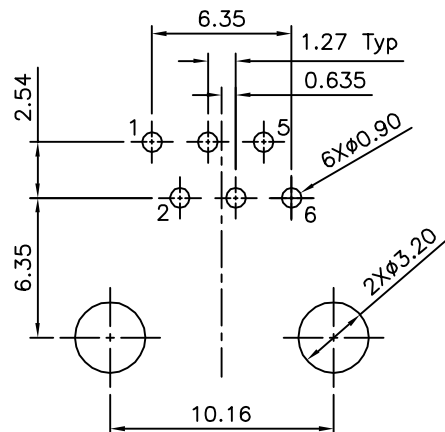
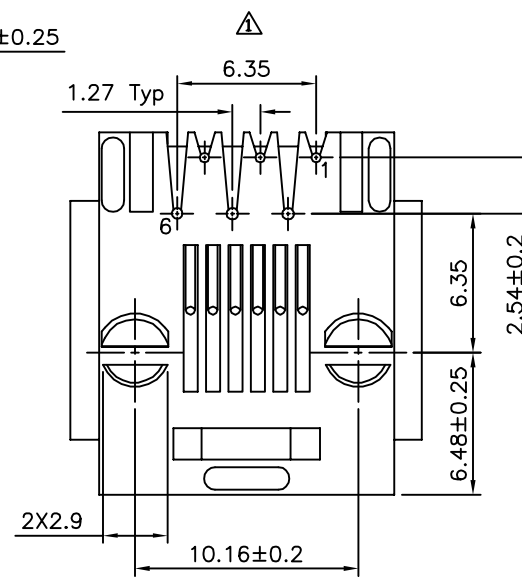


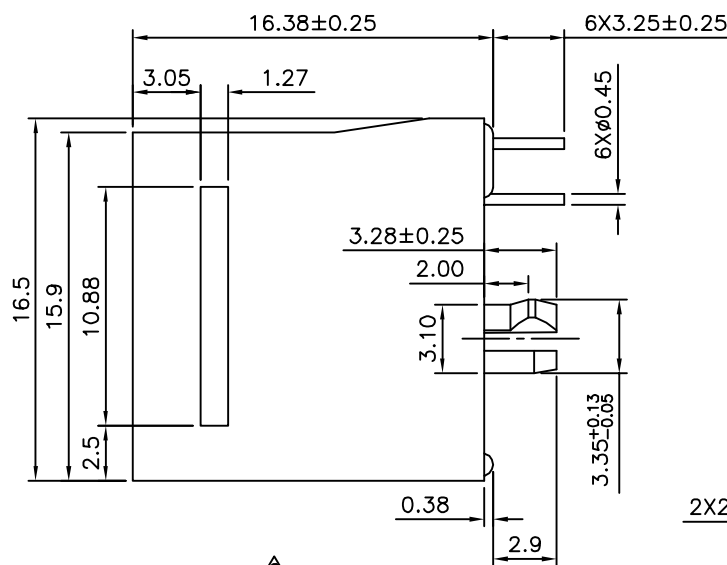

Recommended P.C.B. Layout
Recommended P.C.B. Thickness:1.6mm
Tolerance:±0.05(Top View)

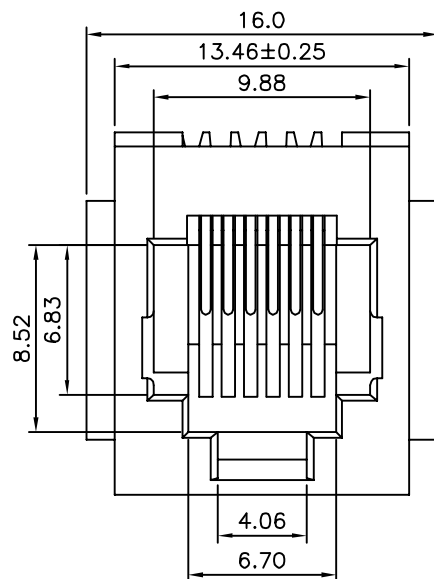

△△ SPECIFICATION
Current Rating:1.5A Max.
Voltage Rating:150V AC Max.
Operating Temperature:-40°C~85°C
Housing:PBT+G.F.(UL94V-0),Black
△△ Contacts:Phosphor Bronze
20390:Gold Plated 06u" Over All,Over Nikcel
04913:Gold Plated 15u" Over All,Over Nikcel
Cavity Confirms To FCC Rules And Regulations
Part 68,Subpart F.
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20390

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△△ .X ±0.25
.XX ±0.13
.XXX ±0.05

SCALE


NONE

REV.

A3

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify Spec.	HZF	08/10/2015
△A2		Modify Data	HZF	09/25/2012
△A1		Modify Data	HZF	07/27/2010
△A0		NEW RELEASE	HZF	01/19/2008