

SPECIFICATION

1.Material&Finish

Insulator:LCP(UL94V-0),Black
Contact:Brass,Tin Plated
Solder Tabs:Brass,Tin Plated


2.Electrical Characteristics

Current Rating:5A AC,DC
Voltage Rating:250V AC,DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.





3.Environmental Characteristics

Temperature Range:-40°C~+105°C

4.RoHS Compliant

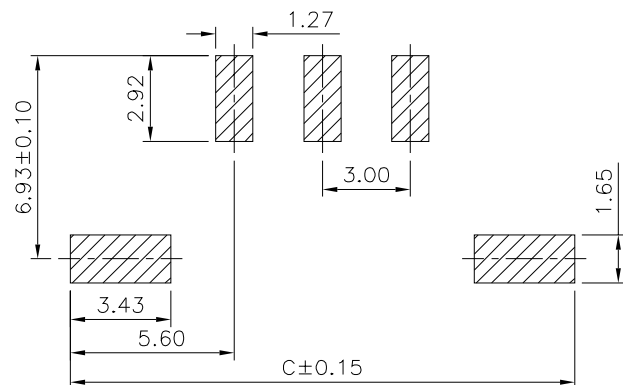

Recommended P.C.B. Layout
Top View,Tolerance:±0.05

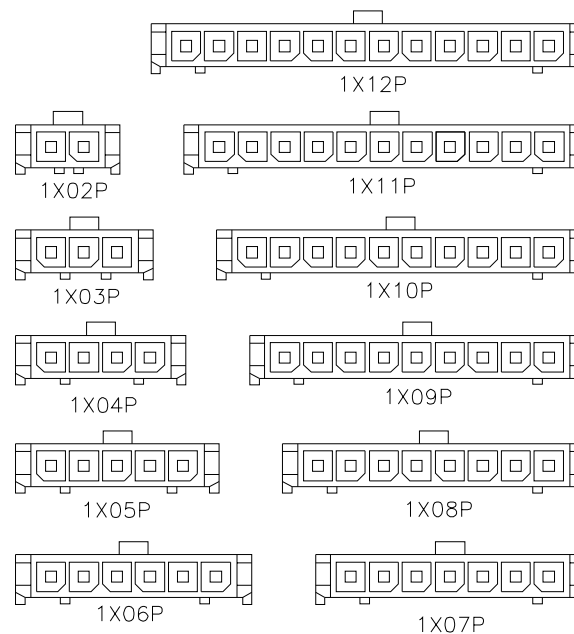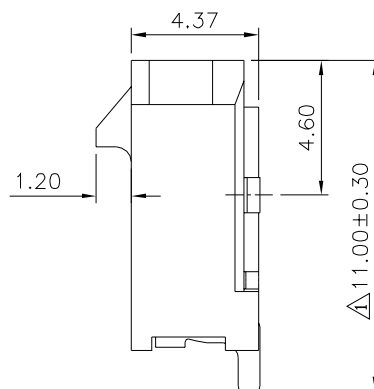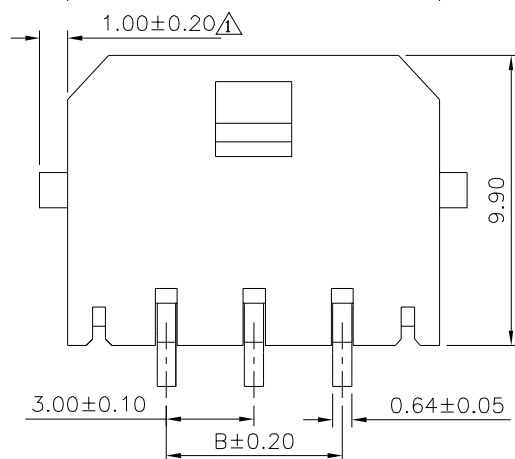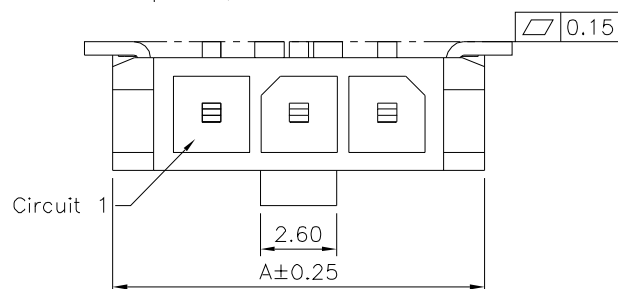

Pin	A	B	C
02	9.65	3.00	14.20
03	12.65	6.00	17.20
04	15.65	9.00	20.20
05	18.65	12.00	23.20
06	21.65	15.00	26.20
07	24.65	18.00	29.20
08	27.65	21.00	32.20
09	30.65	24.00	35.20
10	33.65	27.00	38.20
11	36.65	30.00	41.20
12	39.65	33.00	44.20

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20595

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
XX ±0.25
XXX ±0.20
XXX ±0.05
ANG. ±1°
UNIT
mm



△ B1

Modify Data

HZF

04/25/2022

△ B0

NEW RELEASE

HZF

11/07/2019

NO. REV.

REVISIONS

CHK

DATE