
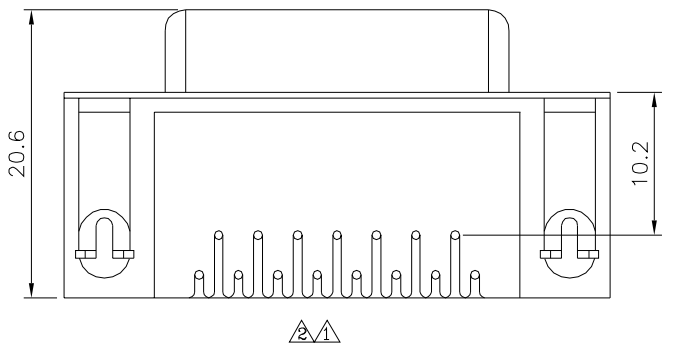
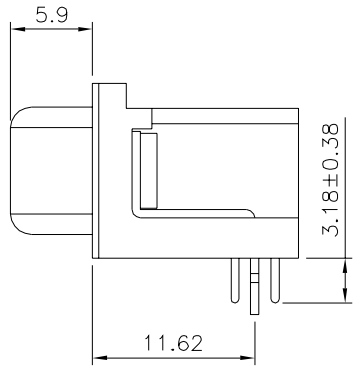
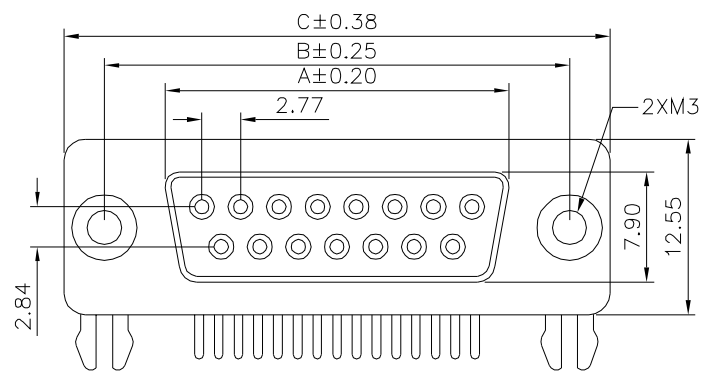


**SPECIFICATION**  
 Current Rating:5A  
 Withstand Voltage:1000V Per Minute  
 Contact Resistance:15 Milliohms Max. 10 Sec.  
 Insulation Resistance:1000 Megaohms Min.  
 At 500V DC  
 Operating Temperature:-55°C~+105°C  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 Contact:Brass,Gold Plated Over Nickel  
 Shell:Steel,Nickel Plated  
 Rivet:Brass,Nickel Plated  
 Boardlock:Steel,Tin Plated  
 RoHS Compliant

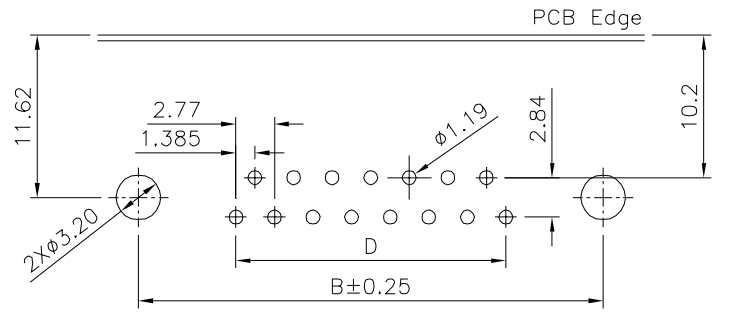

Pin	A	B	C	D
09	16.33	24.99	30.80	11.08
15	24.66	33.32	39.10	19.39
25	38.38	47.04	53.00	33.24
37	54.84	63.50	69.32	49.86

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.25 .XX ±0.15 .XXX ±0.05 ANG. ±1°
20642		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	12/19/2017
△A1		Modify Data	HZF	01/21/2015
△A0		NEW RELEASE	HZF	06/30/2014