
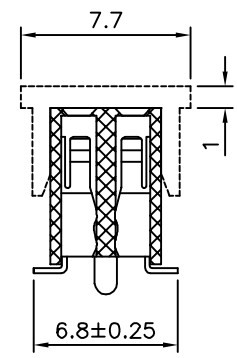
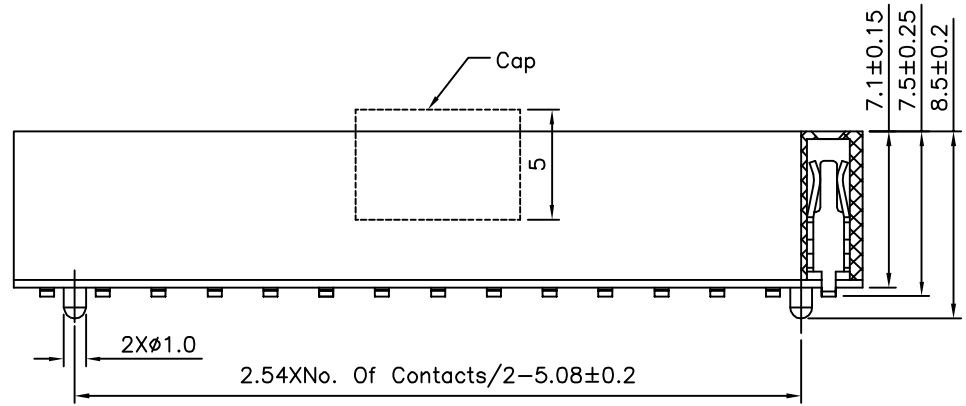


Recommended P.C.B. Layout (Top View)  
(PCB Board Tolerance ±0.05)

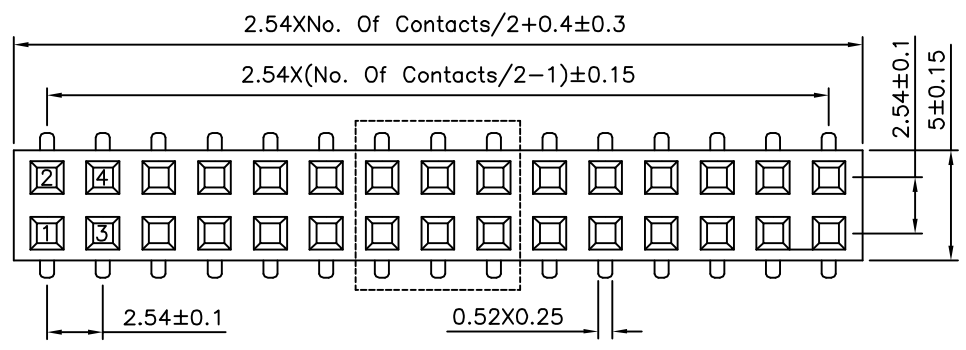

**SPECIFICATION**

Current Rating:3A  
 Withstand Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Phosphor Bronze  
           Gold Flash On Contact Area,Tin  
           Plated On Solder Tails,Over Nickel  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X: ±0.25 X: ±2" .X: ±0.20 .X: ±1.5" .XX: ±0.15 .XX: ±1" .XXX: ±0.10 .XXX: ±0.5"
20651		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		HAO		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	07/05/2014