

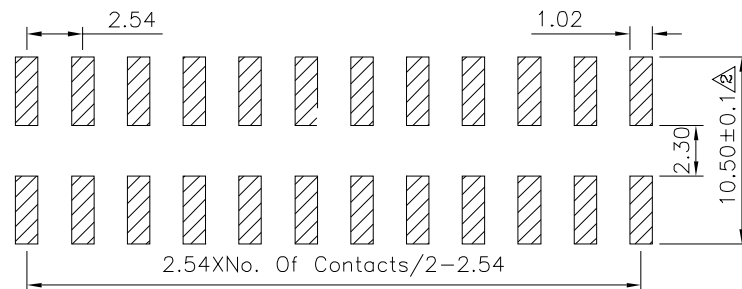
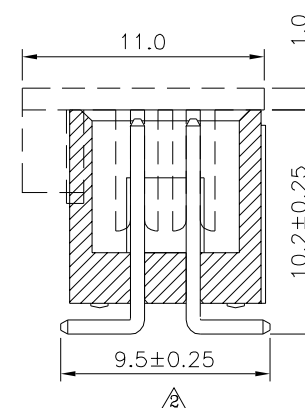


SPECIFICATION

- Current Rating:3 Amps
- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:-40°C~+105°C
- Insulator:PA9T(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

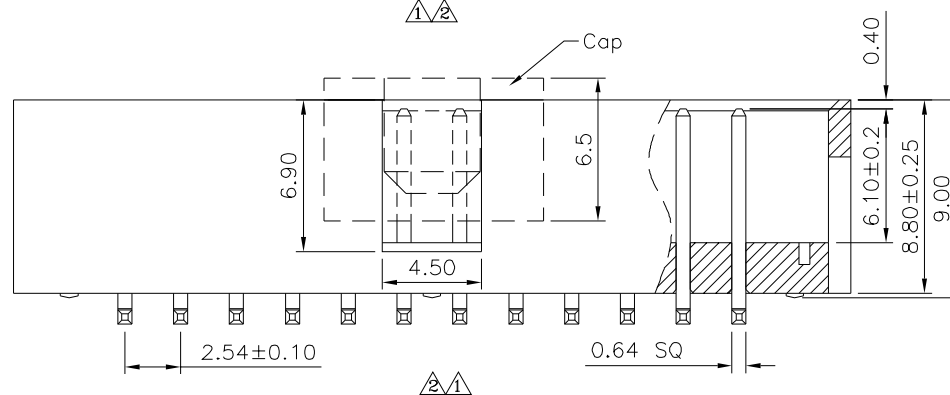

Recommended P.C.B. Layout
PCB Tolerance:±0.05 (Top View)

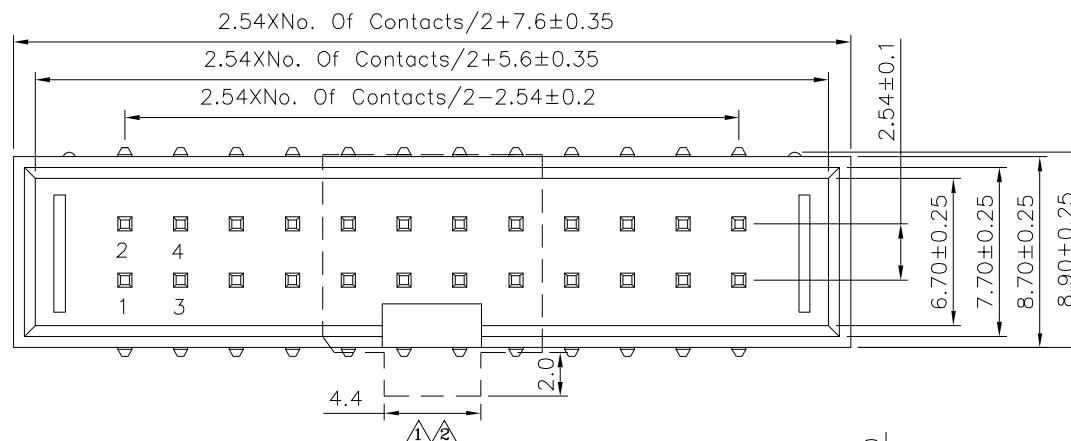

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20862

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X.* ±2*
.XX ±0.20 .X* ±1.5*
.XXX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	05/30/2023
1	A1	Modify Data	HZF	01/14/2019
0	A0	NEW RELEASE	HZF	11/27/2015