
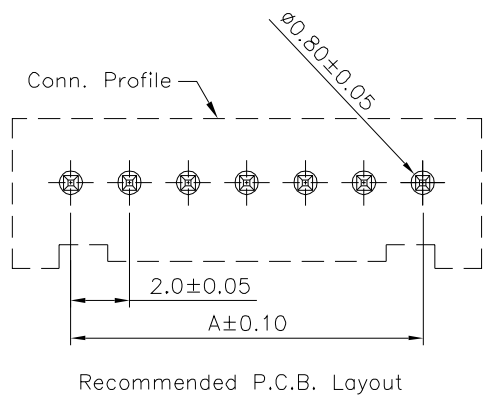
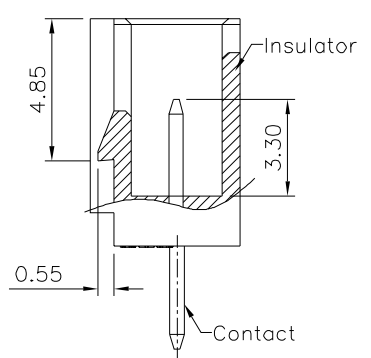
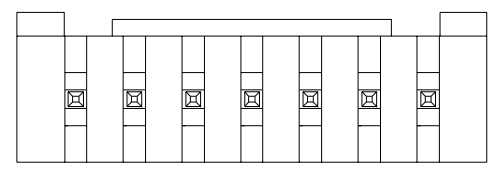
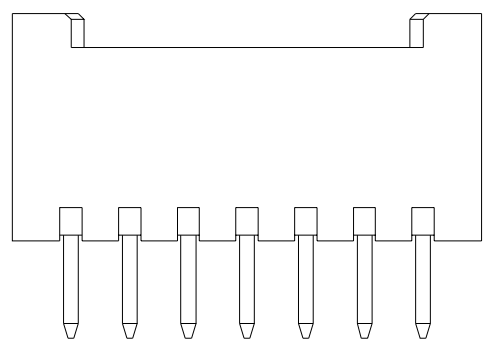
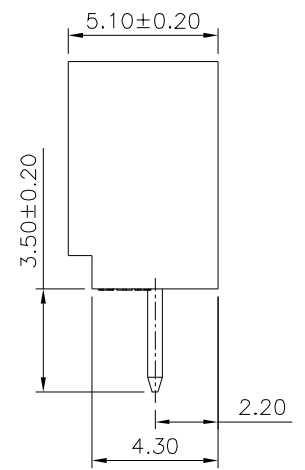
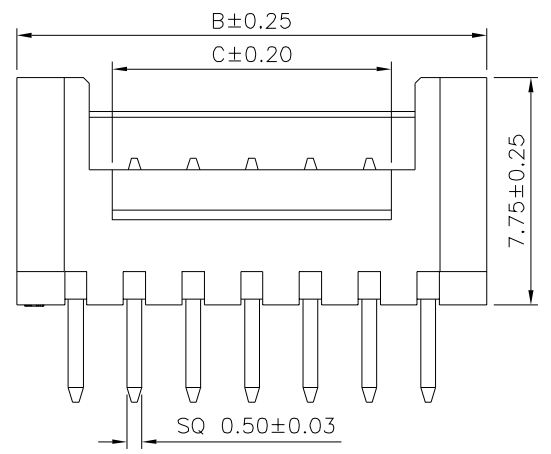



**SPECIFICATION**

Current Rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Withstand Voltage:1000V AC/Minute  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Contact:Brass,Tin Plated  
 Insulator:HTN(UL94V-0),Beige  
 RoHS Compliant

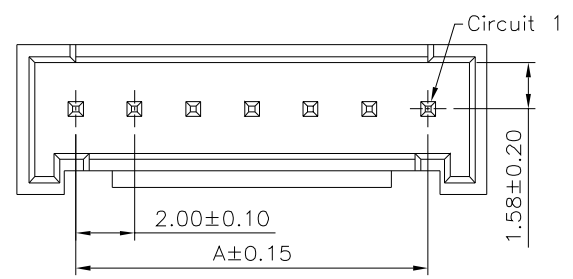

| Pin | A     | B     | C     |
|-----|-------|-------|-------|
| 2   | --    | 6.00  | 1.50  |
| 3   | 4.00  | 8.00  |       |
| 4   | 6.00  | 10.00 |       |
| 5   | 8.00  | 12.00 | 5.50  |
| 6   | 10.00 | 14.00 | 7.50  |
| 7   | 12.00 | 16.00 | 9.50  |
| 8   | 14.00 | 18.00 | 11.50 |
| 9   | 16.00 | 20.00 | 13.50 |
| 10  | 18.00 | 22.00 | 15.50 |
| 11  | 20.00 | 24.00 |       |
| 12  | 22.00 | 26.00 |       |
| 13  | 24.00 | 28.00 |       |
| 14  | 26.00 | 30.00 |       |
| 15  | 28.00 | 32.00 |       |
| 16  | 30.00 | 34.00 |       |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 20870  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.25 X\* Ref. ±6\*  
 .XX ±0.15 X.\* ±3\*  
 .XXX ±0.08 X.\* ±2\*  
 UNIT mm

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| A1  |      | Modify Data | HZF | 09/07/2018 |
| A0  |      | NEW RELEASE | HZF | 11/19/2015 |