
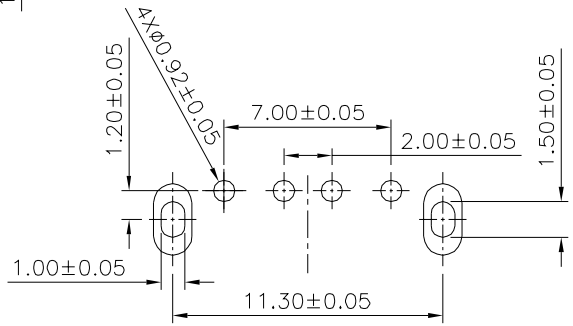
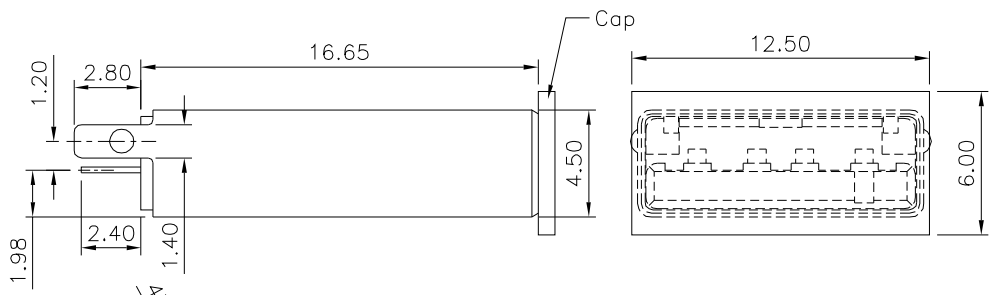



**SPECIFICATION**

⚠ Current: 2.4A Max.  
 Voltage: 30V Max.  
 Withstanding Voltage: 500V AC  
 Contact Resistance: 30 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Temperature Range: -55°C ~ +85°C  
 Mating Force: 35N Max.  
 Withdrawal Force: 10N Min.  
 Durability: 5000 Cycles Min.  
 Insulator: LCP+30%G.F.(UL94V-0), Black  
 Cover: LCP+30%G.F.(UL94V-0), Black  
 Contact: Brass, Gold Flash On Contact Area,  
 Tin Plated On Solder Tails, Over Nickel  
 Shell: Brass, Nickel Plated Over All  
 RoHS Compliant

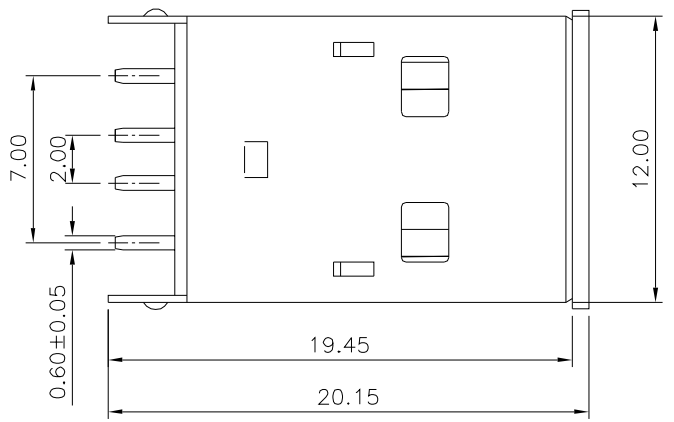

Recommended P.C.B. Layout

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. 20878  
SCALE NONE

APPROVED BY MEI  
CHECKED BY HZF  
DRAWING BY CYP  
REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .x ±0.38 .x\* ±2°  
 .xx ±0.25 .xx\* ±1°  
 .xxx ±0.13 .xxx\* ±0.5°  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	07/02/2016
⚠ A0		NEW RELEASE	HZF	01/18/2012