

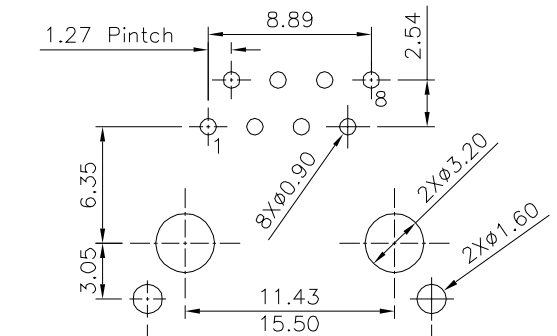
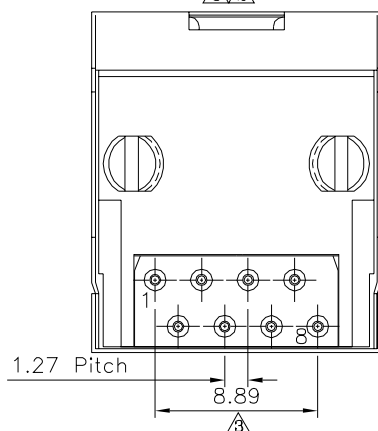
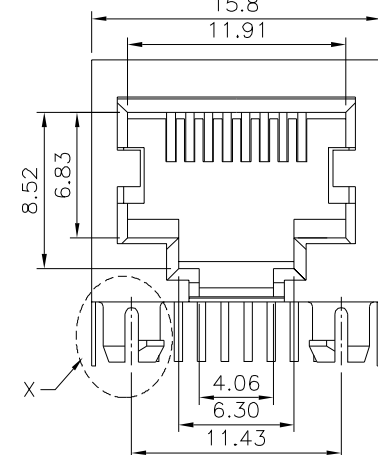
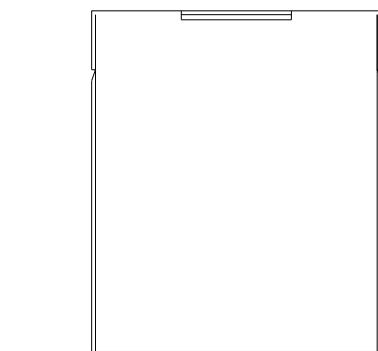


3.1 SPECIFICATION

Current Rating:1.5A Max.
 Voltage Rating:150V AC Max.
 Operating Temperature: -40°C~+85°C
 Relative Humidity: 70% ±10%RH
 Insulation Resistance:500 Megaohms Min. Initial
 At 500V DC
 Contact Resistance:20 Milliohms Max. Initial
 30 Milliohms Max. Final
 Durability:750 Cycles
 Dielectric Withstanding Voltage:
 1000V RMS. At 60Hz,1 Minute Between
 Adjacent Contacts
 1500V RMS. At 60Hz,1 Minute Between
 Shield And Contacts
 Housing:PBT+G.F.(UL94V-0),Black
 Insert Housing:PBT+G.F.(UL94V-0),Black
 Contacts:Phosphor Bronze
 Gold Plated 6u" Over All,Over Nickel
 Shield:Brass,Nickel Plated
 Cavity Conforms To FCC Rules And Regulations
 Part 68,Subpart F.
 RoHS Compliant

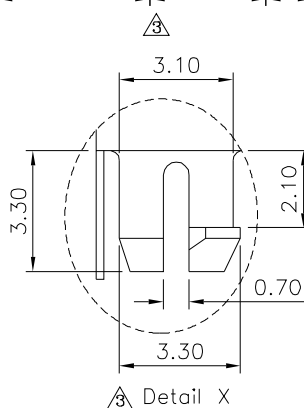

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)Thickness:1.6mm

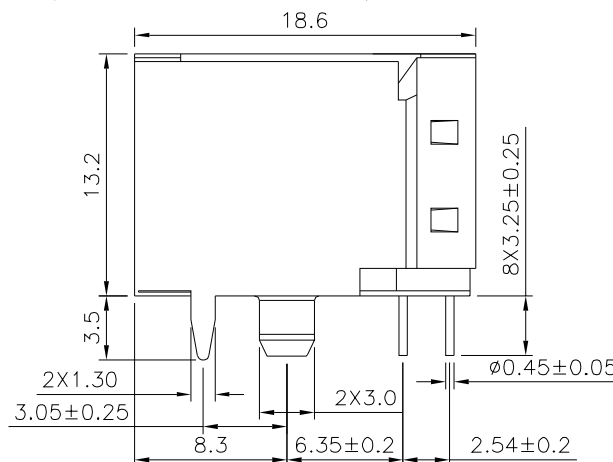

Detail X

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 3.1 3.2 3.3

20885

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.13
 .XXX ±0.05
 ANG. ±0.5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
3.1	A3	Modify Data	HZF	03/22/2018
3.2	A2	Modify Data	HZF	03/04/2011
3.3	A1	Modify P/N:MJFS0808FX15A3-H -->MJFS0808FXXA3-H,Add 6u"	HZF	02/03/2010
3.4	A0	NEW RELEASE	HZF	04/22/2008