



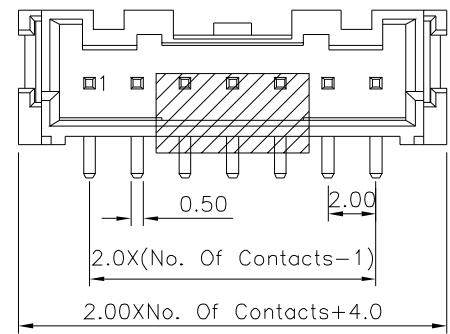


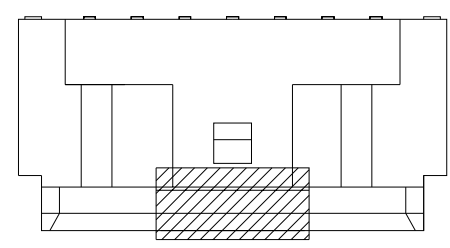


SPECIFICATION
 Current Rating:3A AC/DC Max.
 Voltage Rating:250V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Dielectric Withstanding Voltage:800V AC/Minute
 Temperature Range:-25°C~+85°C
 Insulator:PA6T(UL94V-0),Nature
 Pin:Brass,Tin Plated
 Solder Tab:Brass,Tin Plated
 RoHS Compliant



2 ~ 6P

10 ~ 15P

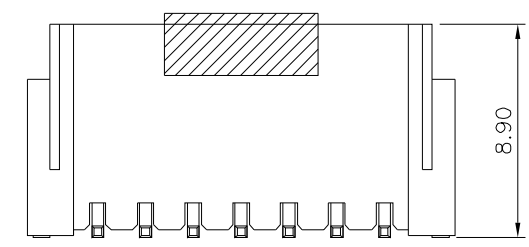

7 ~ 9P

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10
20952		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A0	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	08/28/2016