
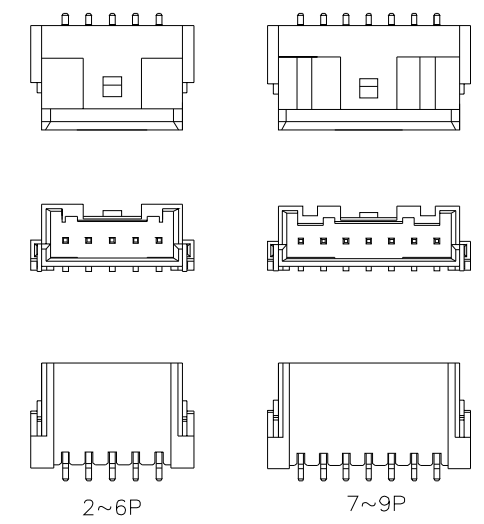

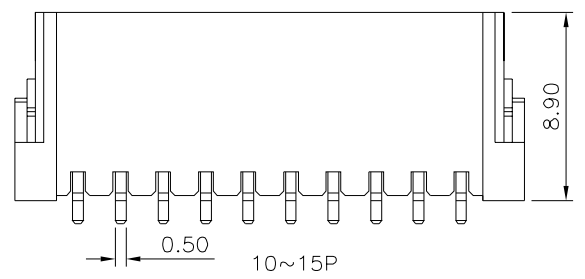
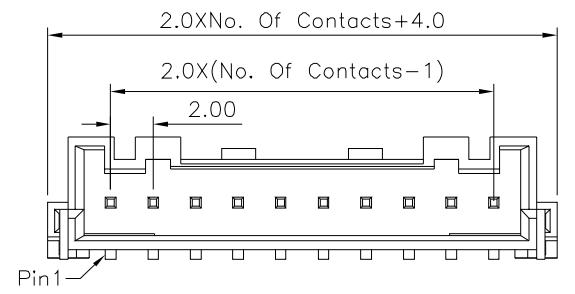


**SPECIFICATION**  
 Current Rating:3A AC/DC Max.  
 Voltage Rating:250V AC/DC  
 Dielectric Withstanding Voltage:800V AC/Minute  
 Insulation Resistance:1000 Megaohms Min.  
 Contact Resistance:20 Milliohms Max.  
 Ambient Temperature Range:-25°C~+85°C  
 Insulator:PA6T(UL94V-0),Nature  
 Contact:Brass,Tin Plated  
 Solder Tab:Brass,Tin Plated  
 No. Of Contacts:2~15 Positions  
 RoHS Compliant

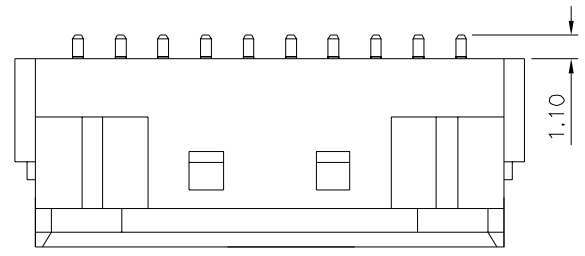

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10
20975		MEI		
		CHECKED BY HZF		
SCALE		DRAWING BY		UNIT mm
NONE		CYP		
REV.	A0	NO. REV.		△ A0
		REVISIONS		NEW RELEASE
		CHK		HZF
		DATE		06/28/2016
